

PAR 280



TAM OTOMATİK TESTERE TEZGAHI FULL AUTOMATIC BANDSAW MACHINE



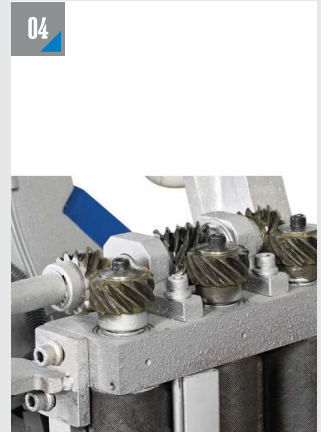
MALZEME SIKMA SİSTEMİ
MATERIAL CLAMPING SYSTEM



KUMANDA PANELİ
CONTROL PANEL




MENGENE SİSTEMİ
CLAMPING SYSTEM



MALZEME SÜRME SİSTEMİ
MATERIAL FEEDING SYSTEM

ÖLÇÜLER DIMENSIONS

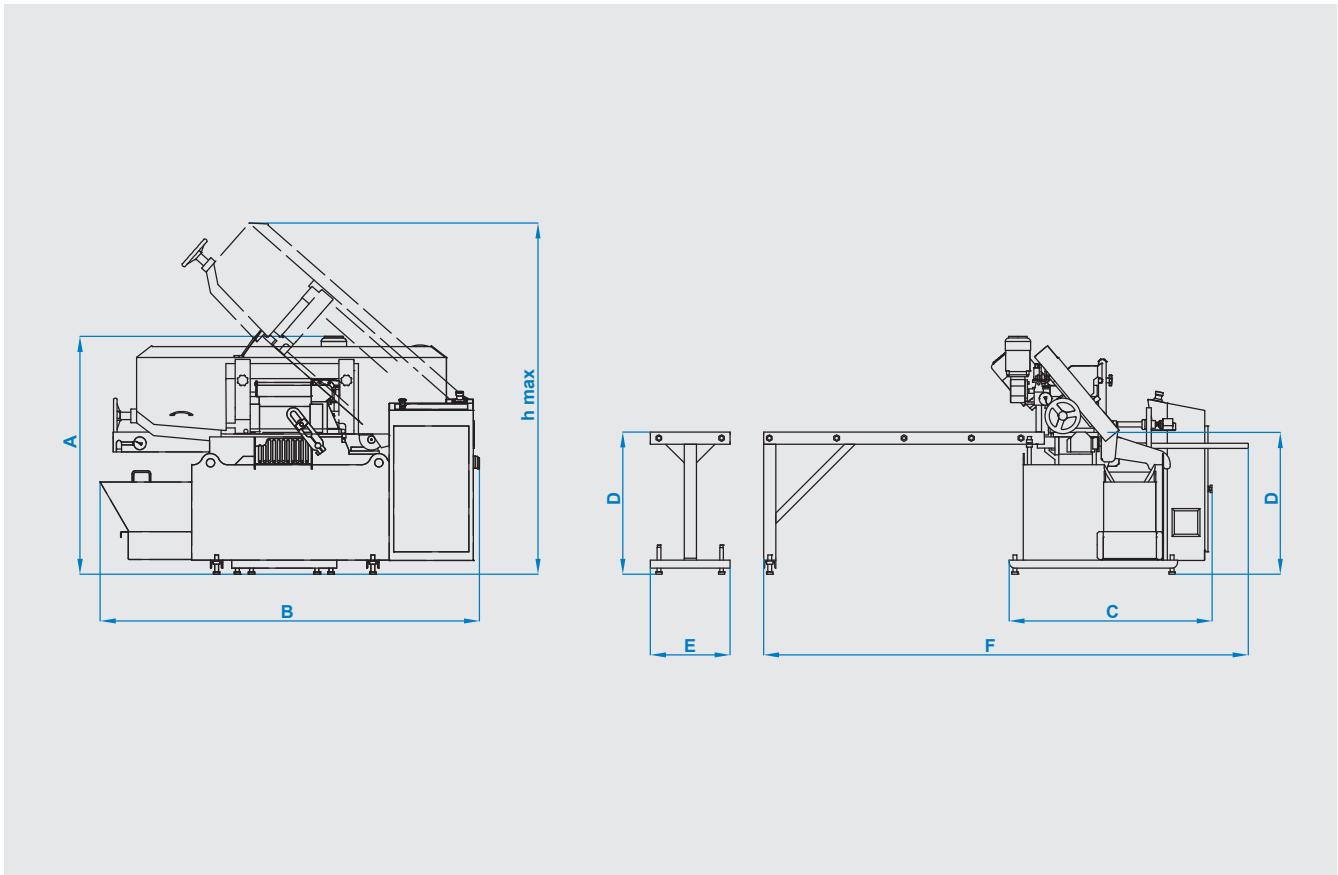MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER / TECHNICAL FEATURES

A	1235 mm 48.62 inch	B	2030 mm 79.92 inch	C	1180 mm 46.46 inch	D	725 mm 28.54 inch	E	425 mm 16.73 inch	F	2590 mm 101.97 inch	hmax	1880 mm 74.02 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	----------------------	---	------------------------	------	-----------------------


 Otomatik Automatic	 Şerit Ölçüsü Blade Dimension 27 x 0.9 x 3670 mm 1 x 0.035 x 144.5 inch	 kW Şerit Motoru Blade Motor 1.5 kW - 1500 d/d 2 hp - 1500 rpm	 kW Sürücü Motor Feeding Motor 0.25 kW - 1500 d/d 0.33 hp - 1500 rpm
 kW OIL Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm	 kW H ₂ O Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	 Voltaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 2.62 kW 3.51 hp
 Kesme Hızı Cutting Speed 15 m/dk - 100 m/dk 130 m/dk - 426 ft/min	 KG LBS Ağırlık Weight 620 kg 1367 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

 Kesim Kapasitesi Cutting Capacity 280 mm 11.02 inch	 Kesim Kapasitesi Cutting Capacity 290 mm 11.42 inch	 60°	 45°	 30°	 0°	 0°	 15°	 30°

PAR 280 PLC




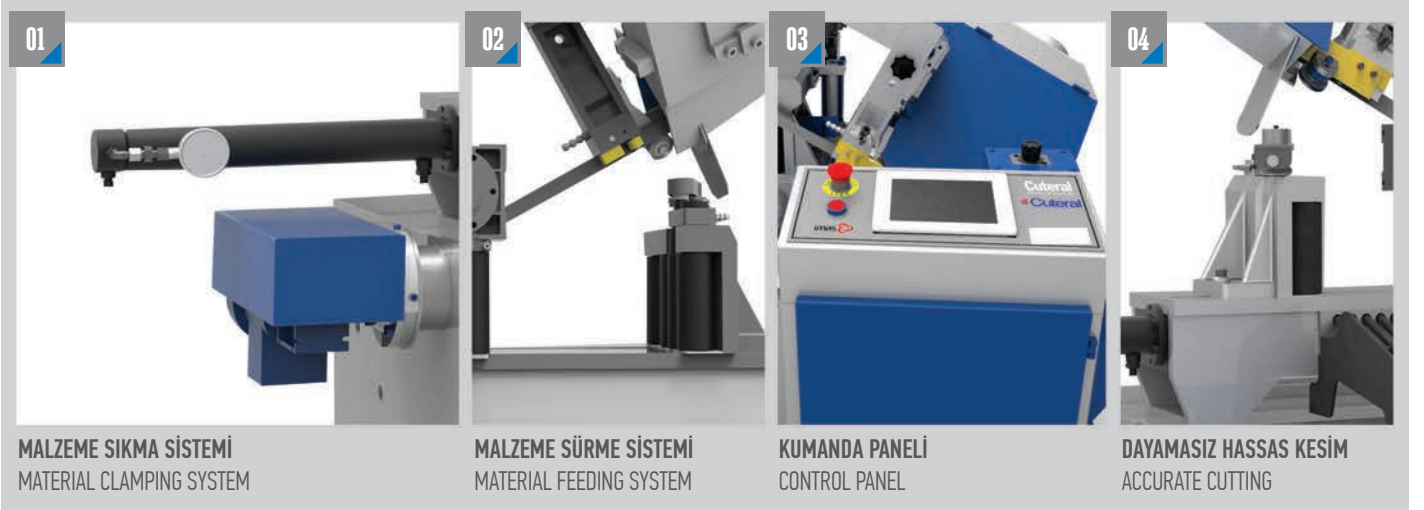TAM OTOMATİK PLC KONTROLLÜ TESTERE TEZGAHI FULL AUTOMATIC PLC CONTROL BANDSAW MACHINE



ÖLÇÜLER DIMENSIONS

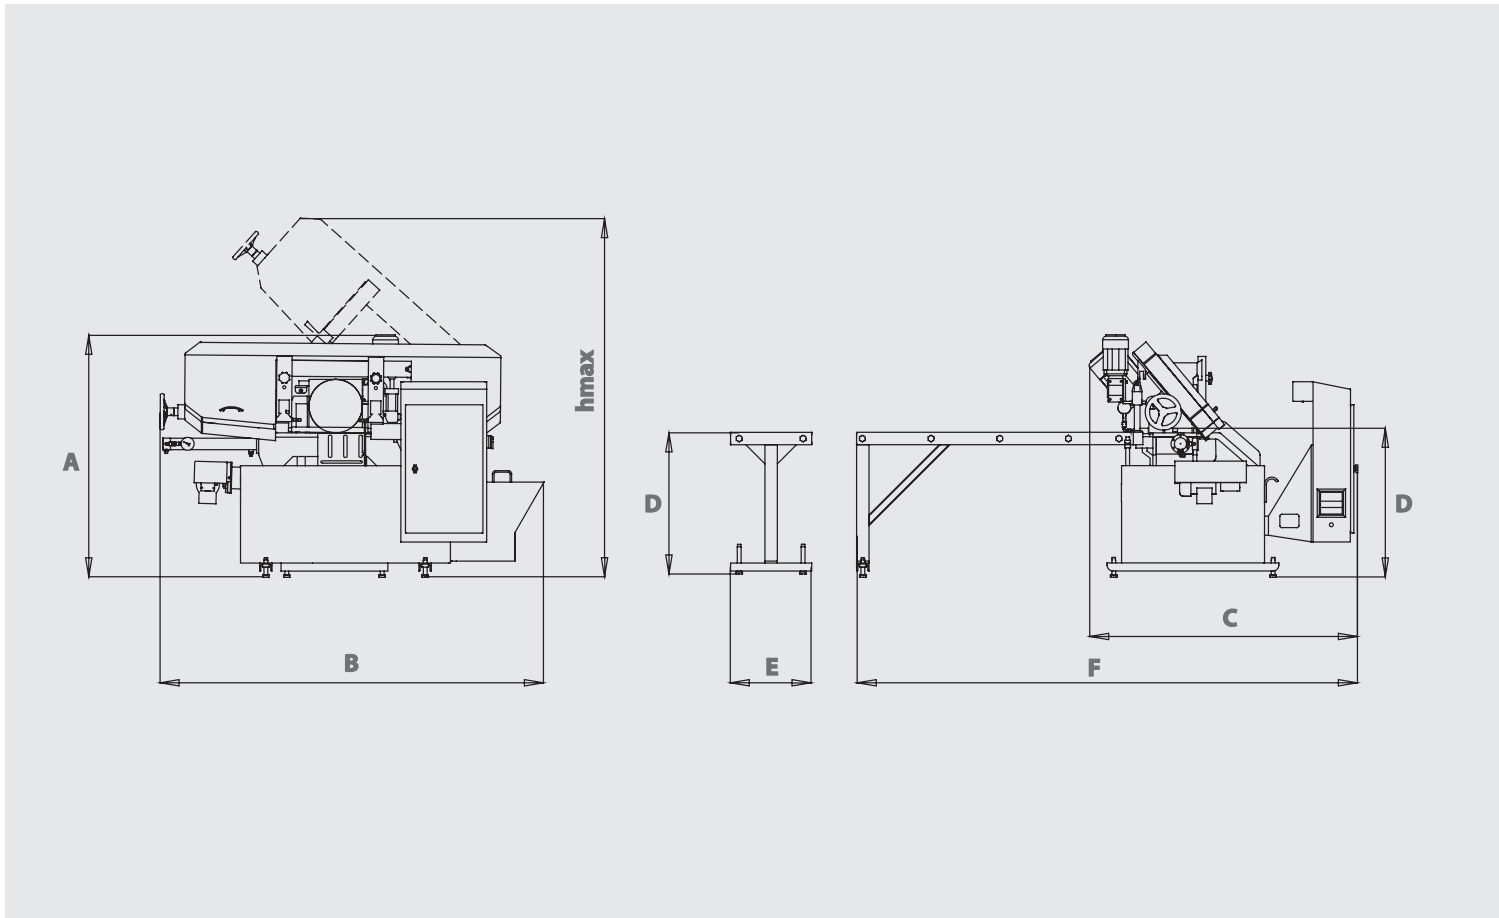MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1215 mm 47.83 inch	B	2010 mm 79.13 inch	C	1410 mm 55.51 inch	D	750 mm 29.53 inch	E	525 mm 20.67 inch	F	2630 mm 103.54 inch	hmax	1850 mm 72.83 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	----------------------	---	------------------------	------	-----------------------

PLC Otomatik Automatic	Şerit Ölçüsü Blade Dimension 27 x 0.9 x 3670 mm 1 x 0.035 x 144.5 inch	Şerit Motoru Blade Motor 1,5 kW - 1500 d/dk 2 hp - 1500 rpm	Sürücü Motor Feeding Motor 0.37 kW - 1000 d/dk 0.49 hp - 1000 rpm
Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm	Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 2,92 kW 3,91 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 130 m/dk - 426 ft/min	Ağırlık Weight 870 kg 1918 lbs	Talaş Konveyörü M Chip Conv. M. 0.18 kW - 1500 d/dk 0.24 hp - 1500rpm	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic


Kesim Kapasitesi Cutting Capacity 280 mm 11.02 inch	Kesim Kapasitesi Cutting Capacity 290 mm 11.42 inch	Kesim Kapasitesi Cutting Capacity 280 mm 11.02 inch	Kesim Kapasitesi Cutting Capacity 250 x 250 mm 9.84 x 9.84 inch	Kesim Kapasitesi Cutting Capacity 150 x 290 mm 5.91 x 11.42 inch	Kesim Kapasitesi Cutting Capacity 280 mm 11.02 inch	Kesim Kapasitesi Cutting Capacity 280 mm 11.02 inch	Kesim Kapasitesi Cutting Capacity 280 mm 11.02 inch	Kesim Kapasitesi Cutting Capacity 280 mm 11.02 inch
--	--	--	--	---	--	--	--	--

PAR 300 M







Yarı Otomatik Testere Tezgahı



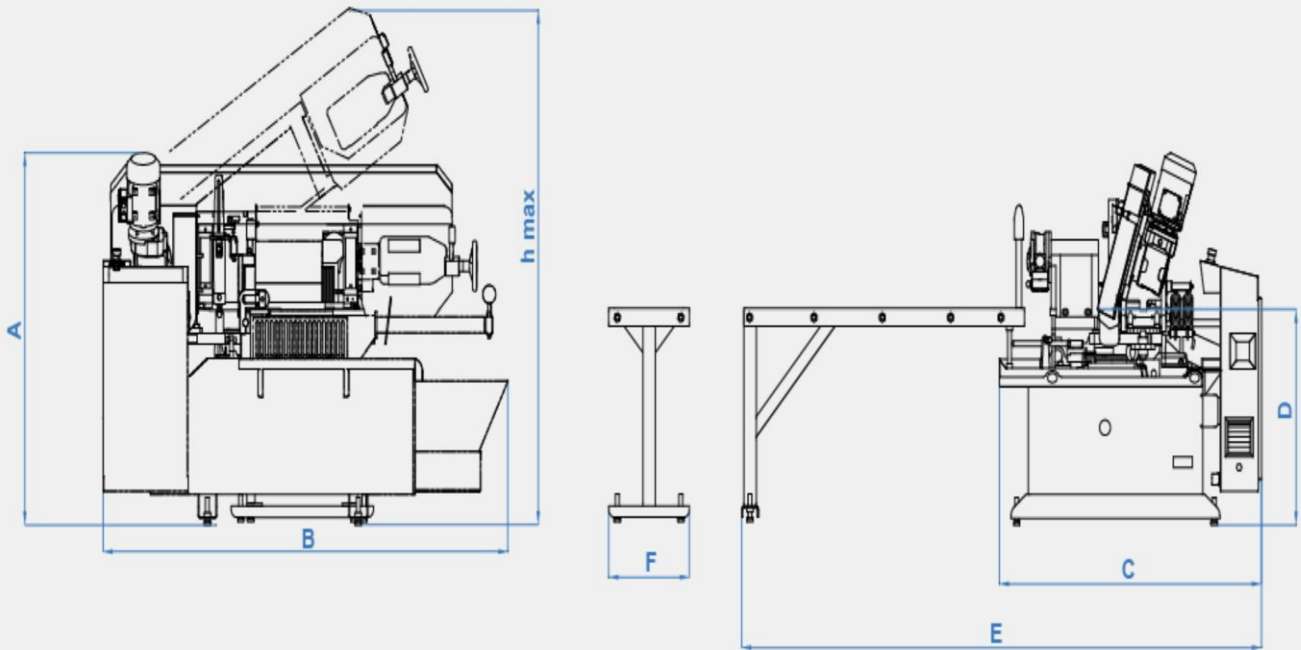TEKNİK ÖZELLİKLER



A	1392 mm 54.80 inch	B	2120 mm 83.46 inch	C	1415 mm 55.71 inch	D	810 mm 31.89 inch	E	2740 mm 107.87 inch	F	425 mm 16.73 inch	h max	2010 mm 79.13 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	------------------------	---	----------------------	-------	-----------------------

 Otomatik Automatic	 Şerit Ölçüsü Blade Dimension	 Şerit Motoru Blade Motor	 Sürücü Motor Feeding Motor
	27 x 0.9 x 3970 mm 1 x 0.035 x 156.3 inch	1.5 kW - 1500 d/d 2 hp - 1500 rpm	0.25 kW - 1500 d/d 0.33 hp - 1500 rpm
 Hidrolik Motor Hydraulic Pump Motor	 Soğutucu Motor Cooling Liquid Motor	 Voltaj Voltage	 Maksimum Güç Maximum Power
0.75 kW - 1400 d/dk 1 hp - 1400 rpm	0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	400 V 400 V	2.62 kW 3.51 hp
 Kesme Hızı Cutting Speed	 Ağırlık Weight	 Malzeme Sıkma Sistemi Material Clamping System	 Şerit Germe Sistemi Blade Tensioning System
15 m/dk - 100 m/dk 49 m/dk - 462 ft/min	KG LBS	Hidrolik Hydraulic	Hidromekanik Hydramechanic


 90°		mm									
 45°		inch									
Kesim Kapasitesi	Kesim Kapasitesi	●	170 mm	270 mm	300 mm	300 mm					
Cutting Capacity	Cutting Capacity	●	6.69 inch	10.62 inch	11.81 inch	11.81 inch					
300 mm	340 mm	■	160 mm	220 mm	220 mm	220 mm					
11.81 inch	13.39 inch	■	6.29 inch	8.66 inch	8.66 inch	8.66 inch					
		■	110 x 170 mm	170 x 270 mm	220 x 300 mm	220 x 340 mm					
		■	4.33 x 6.69 inch	6.69 x 10.62 inch	8.66 x 11.81 inch	8.66 x 13.38 inch					

PAR 350 M






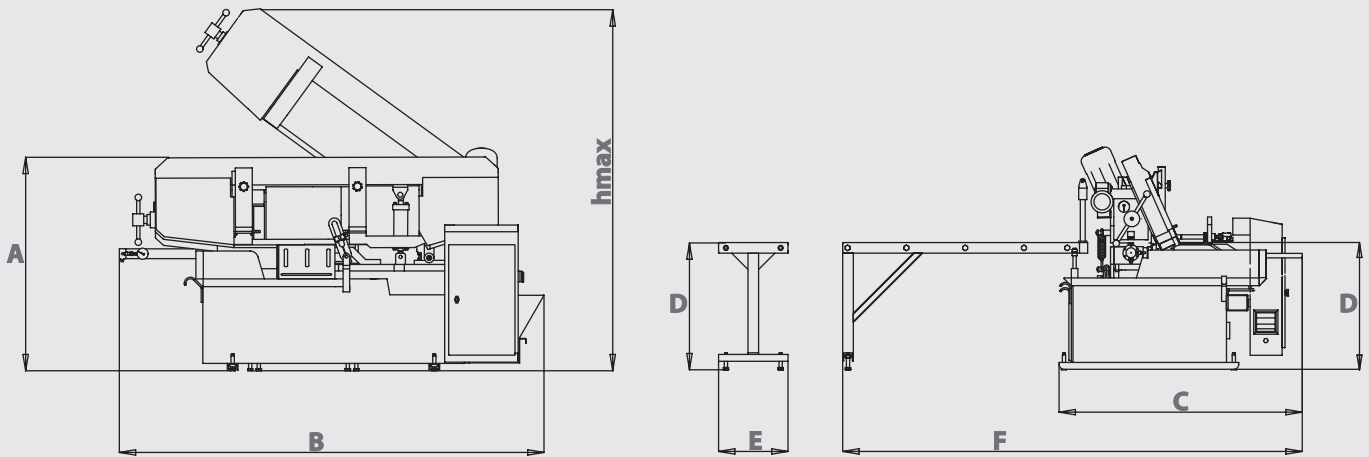
TAM OTOMATİK AÇILI TESTERE TEZGAHI FULL AUTOMATIC MITER BANDSAW MACHINE





TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1370 mm	B	2600 mm	C	1480 mm	D	775 mm	E	525 mm	F	2800 mm	hmax	2150 mm
	53.94 inch		102.36 inch		58.27 inch		30.51 inch		20.67 inch		110.24 inch		84.65 inch


 Otomatik Automatic		 Şerit Ölçüsü Blade Dimension 34 x 1.1 x 4570 mm 1 1/4 x 0.042 x 180 inch		 Şerit Motoru Blade Motor 4 kW - 1500 d/dk 5.36 hp - 1500 rpm		 Sürücü Motor Feeding Motor 0.25 kW - 1500 d/dk 0.33 hp - 1500 rpm	
 Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm		 Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		 Voltaj Voltage 400 V 400 V		 Maksimum Güç Maximum Power 5.12 kW 6.86 hp	
 Kesme Hızı Cutting Speed 15 m/dk - 115 ft/min 100 m/dk - 230 ft/min		 Ağırlık Weight 1150 kg 2335 lbs		 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic	

		mm inch								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	  				350 mm 13.78 inch	350 mm 13.78 inch	320 mm 12.60 inch		
350 mm 13.78 inch	460 mm 18.11 inch					350 x 350 mm 13.78 x 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	300 x 300 mm 11.81 x 11.81 inch		
						350 x 460 mm 13.78 x 18.11 inch	250 x 400 mm 9.84 x 15.75 inch	290 x 180 mm 11.42 x 7.09 inch		

PAR 350 U





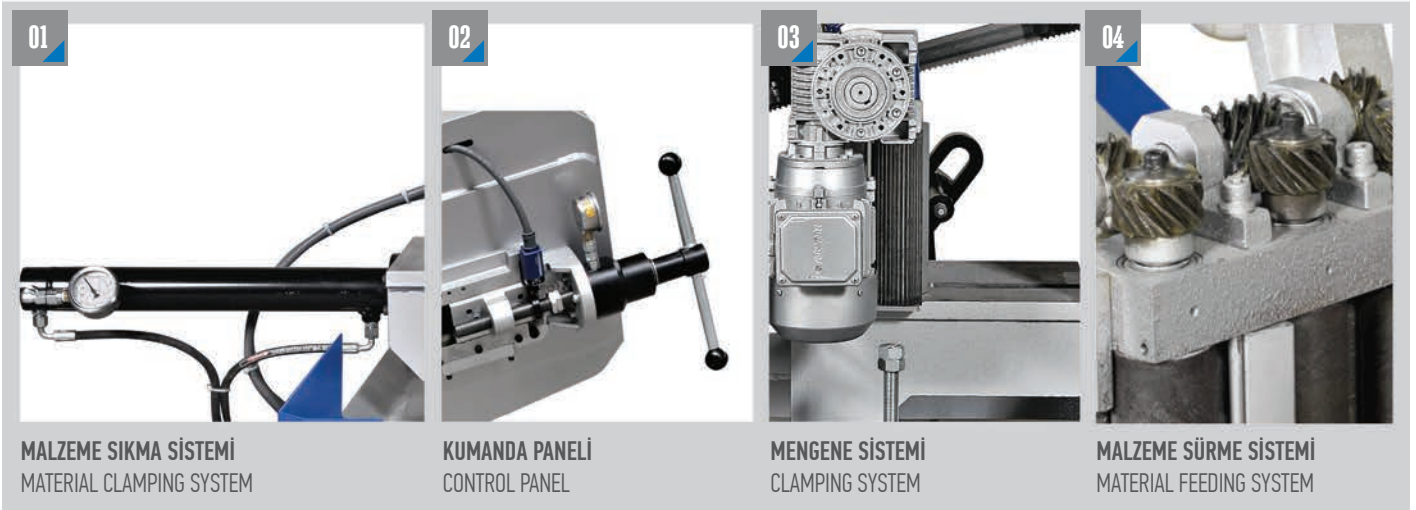TAM OTOMATİK TESTERE TEZGAHI FULL AUTOMATIC BANDSAW MACHINE








ÖLÇÜLER DIMENSIONS

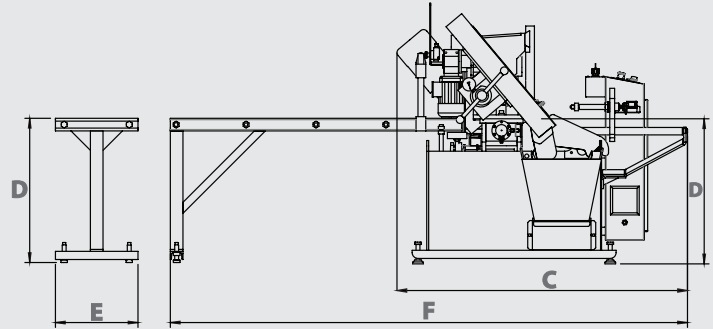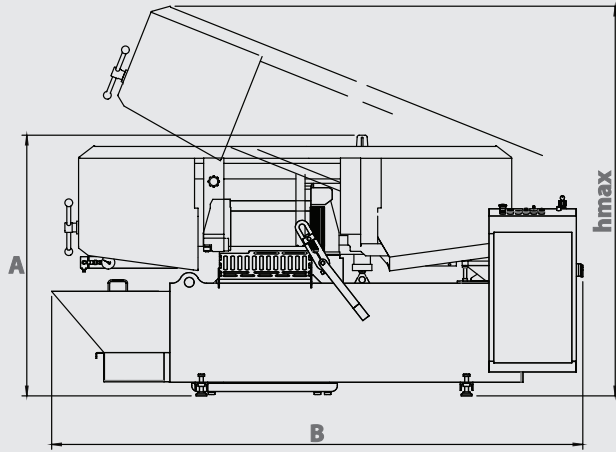
MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1340 mm 52.76 inch	B	2735 mm 107.68 inch	C	1465 mm 57.68 inch	D	750 mm 29.53 inch	E	525 mm 20.67 inch	F	2640 mm 103.94 inch	hmax	2010 mm 79.13 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	----------------------	---	------------------------	------	-----------------------


	Otomatik Automatic		Şerit Ölçüsü Blade Dimension 41 x 1.3 x 4635 mm 1 1/2 x 0.050 x 182.4 inch		Şerit Motoru Blade Motor 4 kW - 1500 d/dk 5.36 hp - 1500 rpm		Sürücü Motor Feeding Motor 0.25 kW - 1500 d/dk 0.33 hp - 1500 rpm
	Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 d/dk		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 5.12 kW 6.86 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min		Ağırlık Weight 1194 kg 2632 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●				350 mm 13.78 inch			
350 mm 13.779 inch	400 mm 15.748 inch	■				350 x 350 mm 13.78 x 13.78 inch			
		■				200 x 400 mm 7.87 x 15.75 inch			

PAR 350 U




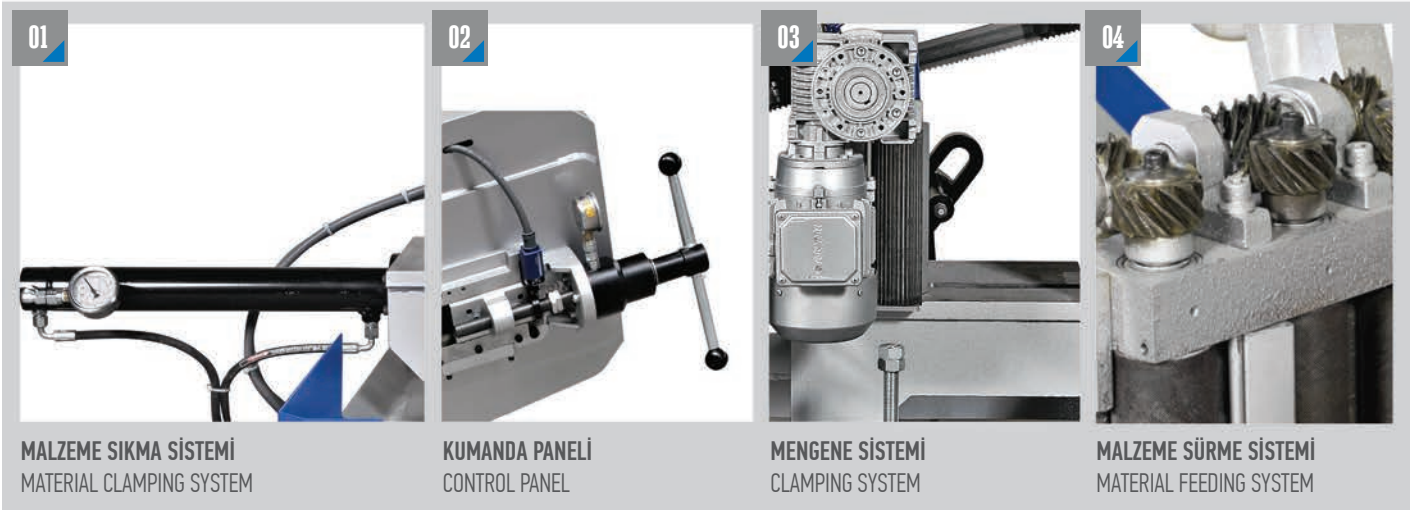TAM OTOMATİK TESTERE TEZGAHI FULL AUTOMATIC BANDSAW MACHINE







ÖLÇÜLER DIMENSIONS

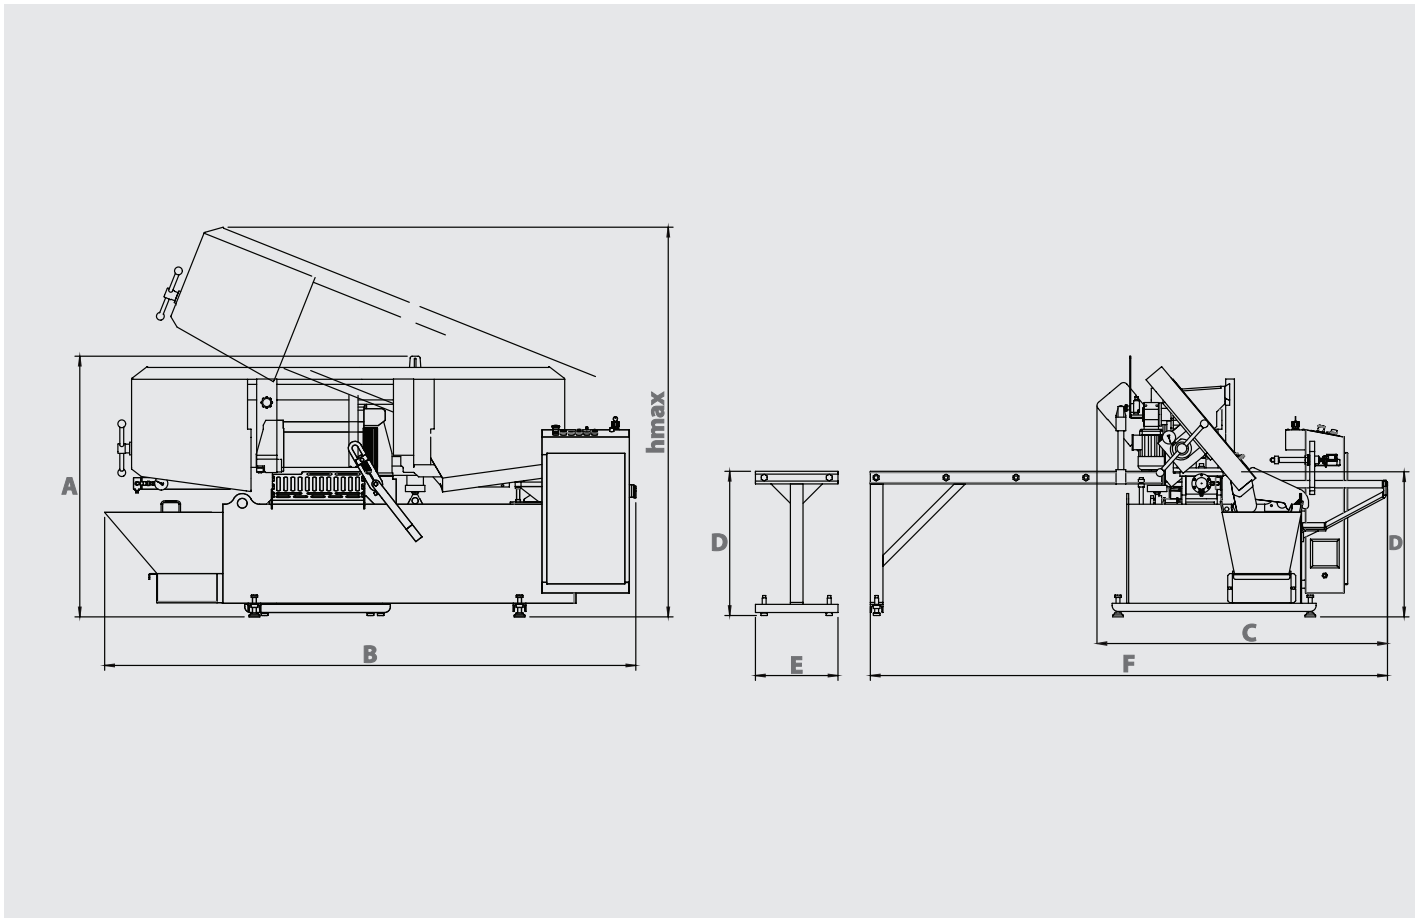MAFSALLI MODELLER PIVOT TYPES




TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1340 mm 52.76 inch	B	2735 mm 107.68 inch	C	1465 mm 57.68 inch	D	750 mm 29.53 inch	E	525 mm 20.67 inch	F	2640 mm 103.94 inch	hmax	2010 mm 79.13 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	----------------------	---	------------------------	------	-----------------------


	Otomatik Automatic		Şerit Ölçüsü Blade Dimension 41 x 1.3 x 4635 mm 1 1/2 x 0.050 x 182.4 inch		Şerit Motoru Blade Motor 4 kW - 1500 d/dk 5.36 hp - 1500 rpm		Sürücü Motor Feeding Motor 0.25 kW - 1500 d/dk 0.33 hp - 1500 rpm
	Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 d/dk		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 5.12 kW 6.86 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min		Ağırlık Weight 1194 kg 2632 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●				350 mm 13.78 inch			
350 mm 13.779 inch	400 mm 15.748 inch	■				350 x 350 mm 13.78 x 13.78 inch			
		■				200 x 400 mm 7.87 x 15.75 inch			

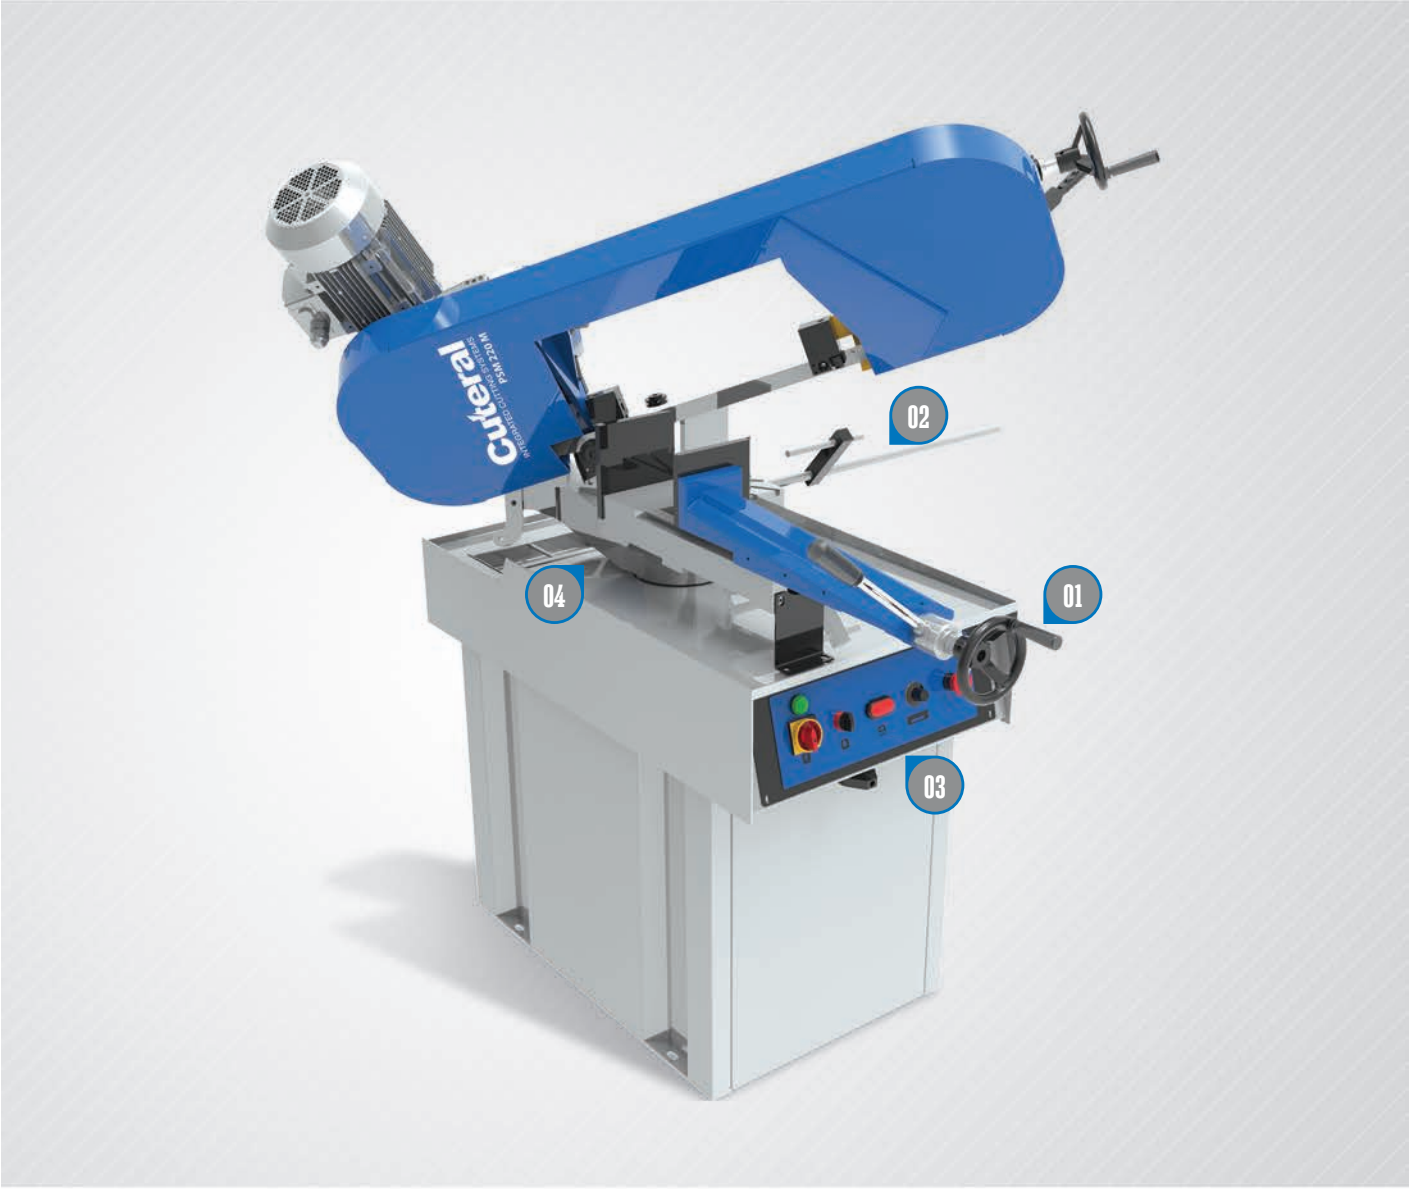PSM 220 M PRATİK




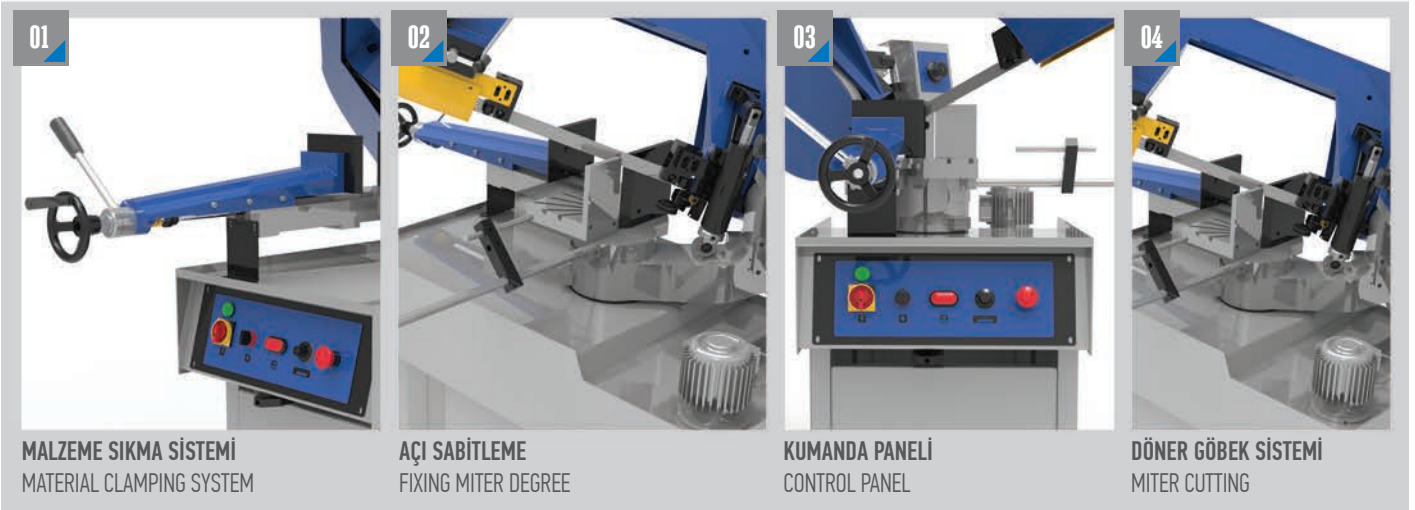MANUEL AÇILI TESTERE TEZGAHI MANUAL MITER BANDSAW MACHINE



ÖLÇÜLER DIMENSIONS

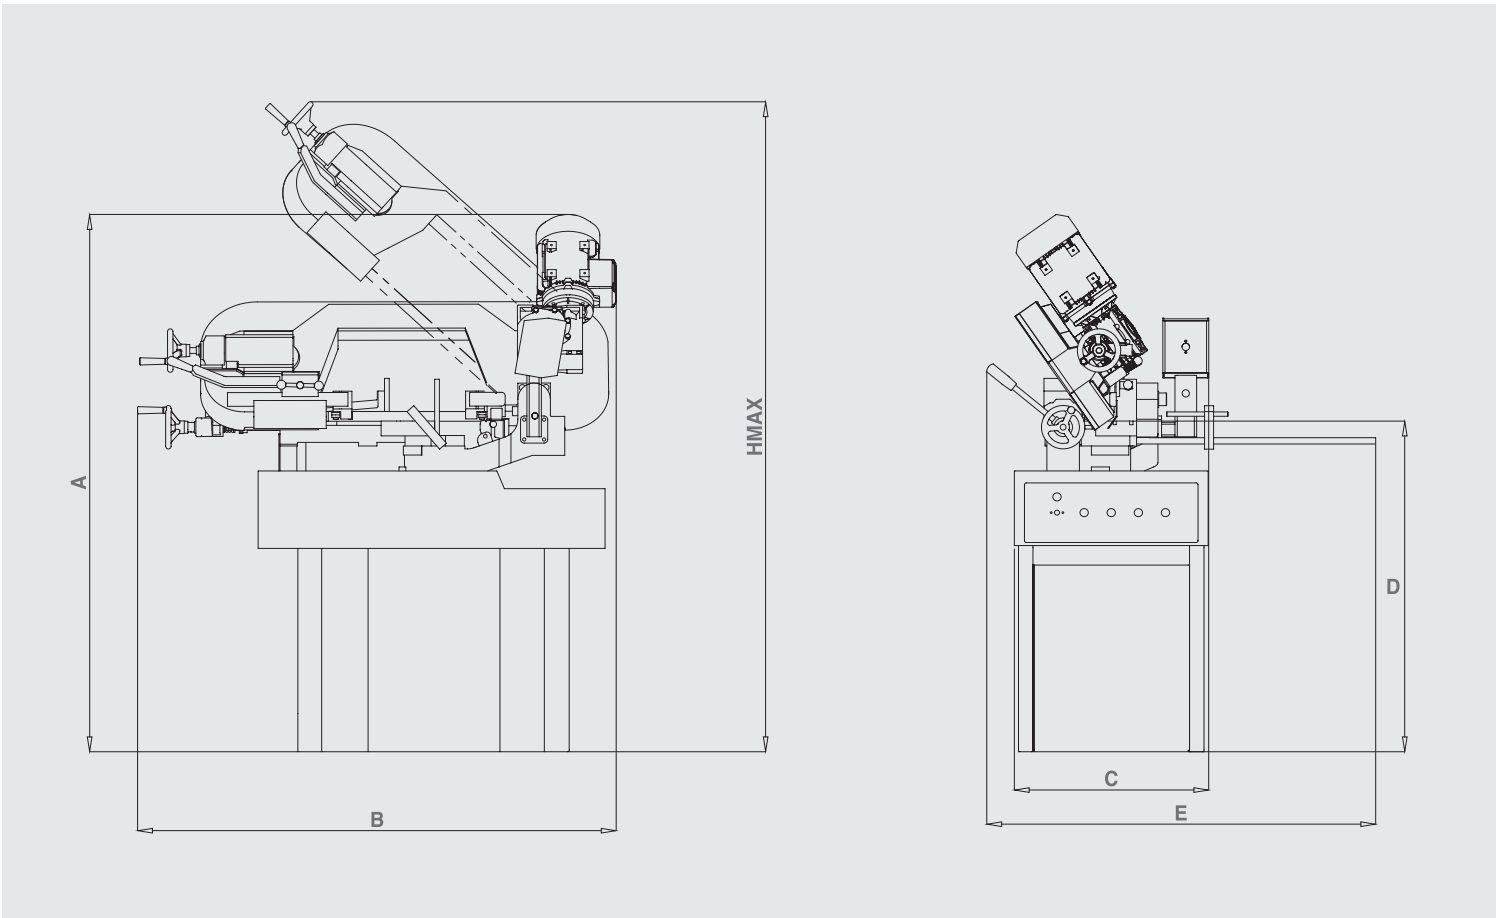MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1485 mm 58.46 inch	B	1323 mm 55.35 inch	C	538 mm 21.18 inch	D	915 mm 36.02 inch	E	1075 mm 42.32 inch	hmax	1800 mm 70.87 inch
---	-----------------------	---	-----------------------	---	----------------------	---	----------------------	---	-----------------------	------	-----------------------



Manuel Manual	Şerit Ölçüsü Blade Dimension 27 x 0.9 x 2500 mm 1 x 0.035 x 98.42 inch	Şerit Motoru Blade Motor 1.1 kW - 1400 d/d 1.47 hp 1400 rpm	Sürücü Motor Feeding Motor Manuel Manual
Soğutucu Motor Cooling Liquid Motor 0.12 kW 3000 d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 220 V 220 V	Maksimum Güç Maximum Power 1.22 kW 1.47 hp	Kesme Hızı Cutting Speed 25 m/dk - 82 ft/min 90 m/dk - 295 ft/min
Ağırlık Weight 250 kg 551.16 lbs	Malzeme Sıkma Sistemi Material Clamping System Manuel Manual	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic	

Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	mm inch	60°	45°	30°	0°	60°	45°	30°	0°
220 mm 8.66 inch	250 mm 9.84 inch	●				220 mm 8.66 inch	200 mm 7.87 inch	150 mm 5.90 inch	80 mm 3.15 inch	220 mm 8.66 inch
		■				220 x 220 mm 8.66 x 8.66 inch	180 x 180 mm 7.09 x 7.09 inch	140 x 140 mm 5.51 x 5.51 inch	80 x 80 mm 3.15 x 3.15 inch	220 x 220 mm 8.66 x 8.66 inch
		■				170 x 250 mm 6.69 x 9.84 inch	200 x 180 mm 7.87 x 7.09 inch	140 x 150 mm 5.51 x 5.91 inch	80 x 80 mm 3.15 x 3.15 inch	170 x 250 mm 6.69 x 9.84 inch

PSM 220 230 DM

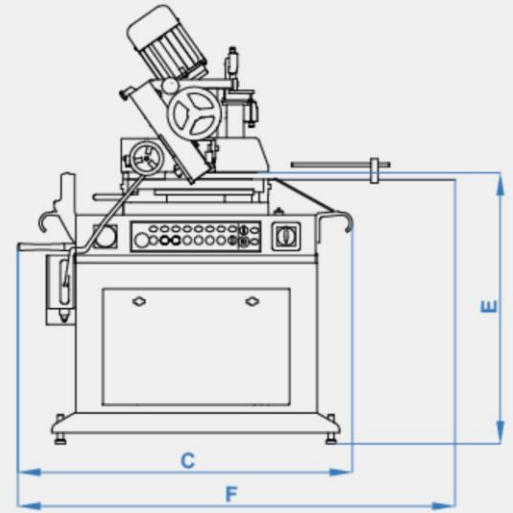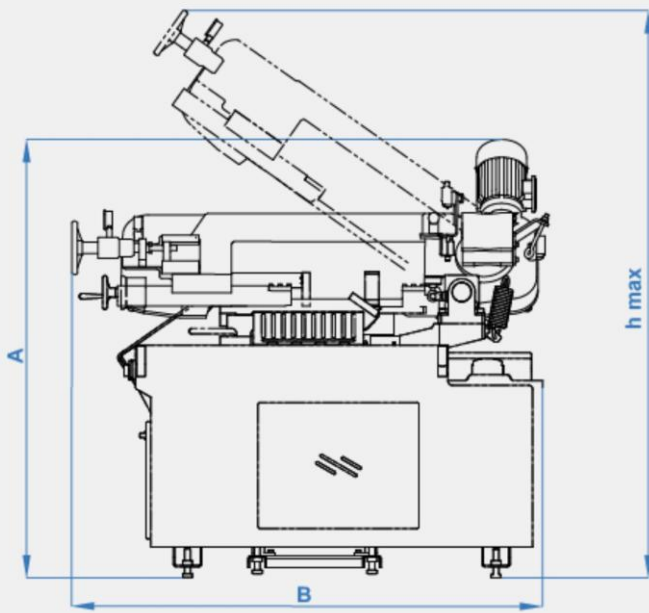Yarı Otomatik Çift Yön Açılı Testere Tezgahı





A	1555 mm 61.22 inch	B	1670 mm 65.75 inch	C	1185 mm 46.65 inch	D	400 mm 15.75 inch	E	695 mm 27.36 inch	F	455 mm 17.91 inch	hmax	2010 mm 79.13 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	----------------------	---	----------------------	------	-----------------------

	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension		Şerit Motoru Blade Motor		Sürücü Motor Feeding Motor
			27 x 0.9 x 3175 mm 1 x 0.035 x 125 inch		1.1 kW - 1000 d/d 1.47 hp - 1000 rpm		Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor		Soğutucu Motor Cooling Liquid Motor		Voltaj Voltage		Maksimum Güç Maximum Power
	0.75 kW - 1400 d/dk 1 hp - 1400 rpm		0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		400 V 400 V		1.97 kW 2.64 hp
	Kesme Hızı Cutting Speed		Ağırlık Weight		Malzeme Sıkma Sistemi Material Clamping System		Şerit Germe Sistemi Blade Tensioning System
	25 m/dk - 100 m/dk 82 m/dk - 328 ft/min		670 kg 1477 lbs		PNömatik Pneumatic		Hidromekanik Hydramechanic

		mm inch	60°	45°	30°	0°	15°	35°	80°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity		220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	130 mm 5.11 inch
220 mm 8.66 inch	330 mm 12.99 inch		180 mm 7.08 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	210 mm 8.26 inch	110 mm 4.33 inch
			220 x 180 mm 8.66 x 7.08 inch	220 x 280 mm 8.66 x 11.06 inch	220 x 330 mm 8.66 x 12.99 inch	220 x 280 mm 8.66 x 11.06 inch	210 x 180 mm 8.26 x 7.08 inch	100 x 130 mm 3.93 x 5.11 inch	

PSM 280

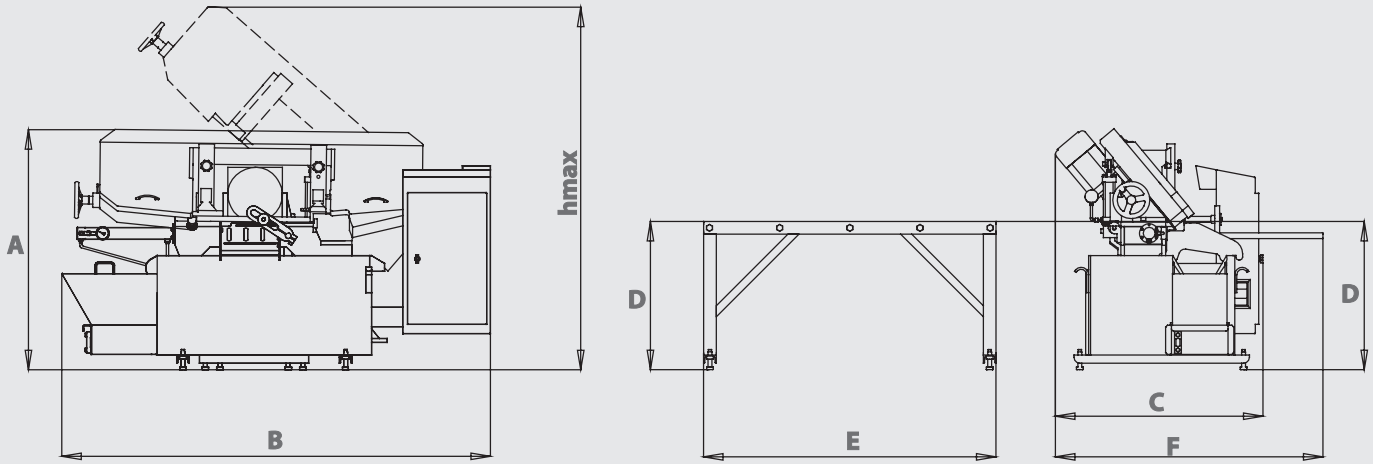


YARI OTOMATİK TESTERE TEZGAHI SEMI AUTOMATIC BANDSAW MACHINE



ÖLÇÜLER DIMENSIONS

MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1235 mm 48.62 inch	B	2200 mm 86.61 inch	C	1065 mm 41.93 inch	D	725 mm 28.54 inch	E	1500 mm 59.06 inch	F	1375 mm 54.13 inch	hmax	1880 mm 74.02 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	-----------------------	---	-----------------------	------	-----------------------

	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension 27 x 0.9 x 3670 mm 1 x 0.035 x 144.5 inch		Şerit Motoru Blade Motor 1,5 kW - 1500 d/dk 2 hp - 1500 rpm		Sürücü Motor Feeding Motor Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 2,37 kW 3,17 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 130 m/dk - 426 ft/min		Ağırlık Weight 662 kg 1459 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●	250 mm 9.84 inch	280 mm 11.02 inch	280 mm 11.02 inch	250 x 250 mm 9.84 x 9.84 inch			
280 mm 7.87 inch	300 mm 11.81 inch	■	210 x 210 mm 8.27 x 8.27 inch	280 x 280 mm 11.02 x 11.02 inch	280 x 280 mm 11.02 x 11.02 inch	140 x 300 mm 5.51 x 11.81 inch			
		■	200 x 220 mm 7.87 x 8.66 inch						

PSM 300 M

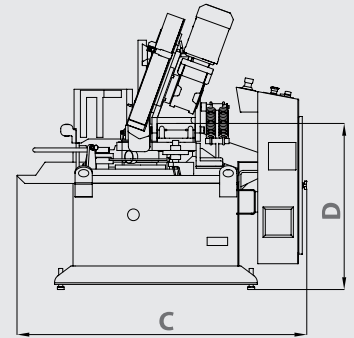

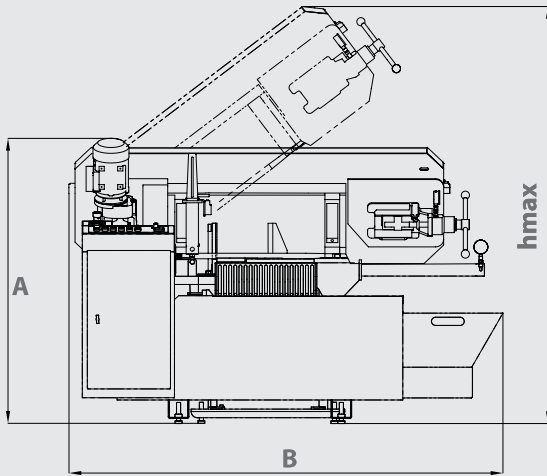


YARI OTOMATİK AÇILI TESTERE TEZGAHI SEMI AUTOMATIC MITER BANDSAW MACHINE



ÖLÇÜLER DIMENSIONS

MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1392 mm 54.80 inch	B	2120 mm 83.46 inch	C	1415 mm 55.70 inch	D	810 mm 31.88 inch	E	1500 mm 59.05 inch	hmax	2036 mm 80.15 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	-----------------------	------	-----------------------

	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension 27 x 0.9 x 3970 mm 1 x 0.035 x 156.3 inch		Şerit Motoru Blade Motor 1,5 kW - 1500 d/dk 2 hp - 1500 rpm		Sürücü Motor Feeding Motor Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 2.37 kW 3.17 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 130 m/dk - 426 ft/min		Ağırlık Weight 950 kg 2094.39 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°		mm inch		60°		45°		30°		0°		10°		15°		20°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity			230 mm 9.05 inch	300 mm 11.8 inch	300 mm 11.8 inch	300 mm 11.8 inch	300 mm 11.8 inch	300 mm 11.8 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch
300 mm 11.8 inch	470 mm 18.5 inch			210 x 210 mm 8.26 x 8.26 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 380 mm 8.66 x 14.96 inch	220 x 380 mm 8.66 x 14.96 inch	220 x 380 mm 8.66 x 14.96 inch	220 x 380 mm 8.66 x 14.96 inch	220 x 380 mm 8.66 x 14.96 inch	220 x 380 mm 8.66 x 14.96 inch	220 x 380 mm 8.66 x 14.96 inch	220 x 380 mm 8.66 x 14.96 inch

PSM 350 M



YARI OTOMATİK AÇILI TESTERE TEZGAHI SEMI AUTOMATIC MITER BANDSAW MACHINE



01
MALZEME SIKMA SİSTEMİ
MATERIAL CLAMPING SYSTEM

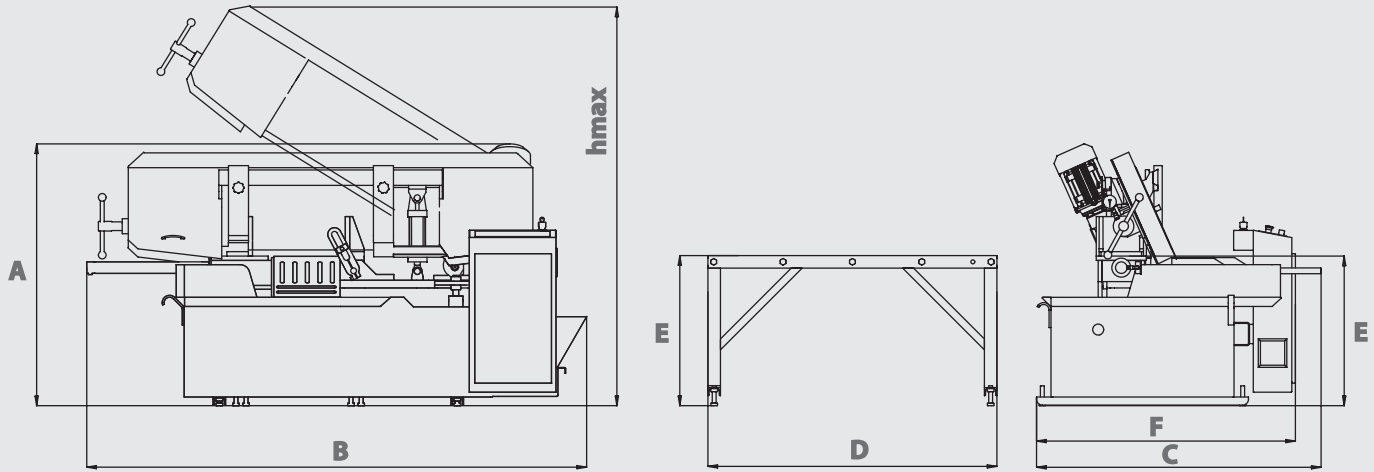
02
ŞERİT GİRDİRME SİSTEMİ
BLADE TENSIONING

03
KUMANDA PANELİ
CONTROL PANEL

04
AÇILI KESİM
MITER CUTTING

ÖLÇÜLER DIMENSIONS

MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1360 mm 53.54 inch	B	2600 mm 102.36 inch	C	1480 mm 58.27 inch	D	1500 mm 59.06 inch	E	780 mm 30.71 inch	F	1355 mm 53.35 inch	hmax	2080 mm 81.89 inch
---	-----------------------	---	------------------------	---	-----------------------	---	-----------------------	---	----------------------	---	-----------------------	------	-----------------------


Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 34 x 1.1 x 4570 mm 1 1/4 x 0.042 x 180 inch	kW Şerit Motoru Blade Motor 4 kW - 1500d/dk 5.36 hp - 1500 rpm	kW Sürücü Motor Feeding Motor Manuel Manual
kW Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm	kW Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 4.87 kW 6.5 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	KG LBS Ağırlık Weight 1140 kg 2513 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

90°	60°	45°	30°	0°	15°	45°	60°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity						
350 mm 13.78 inch	460 mm 18.11 inch						

PSM 350 U




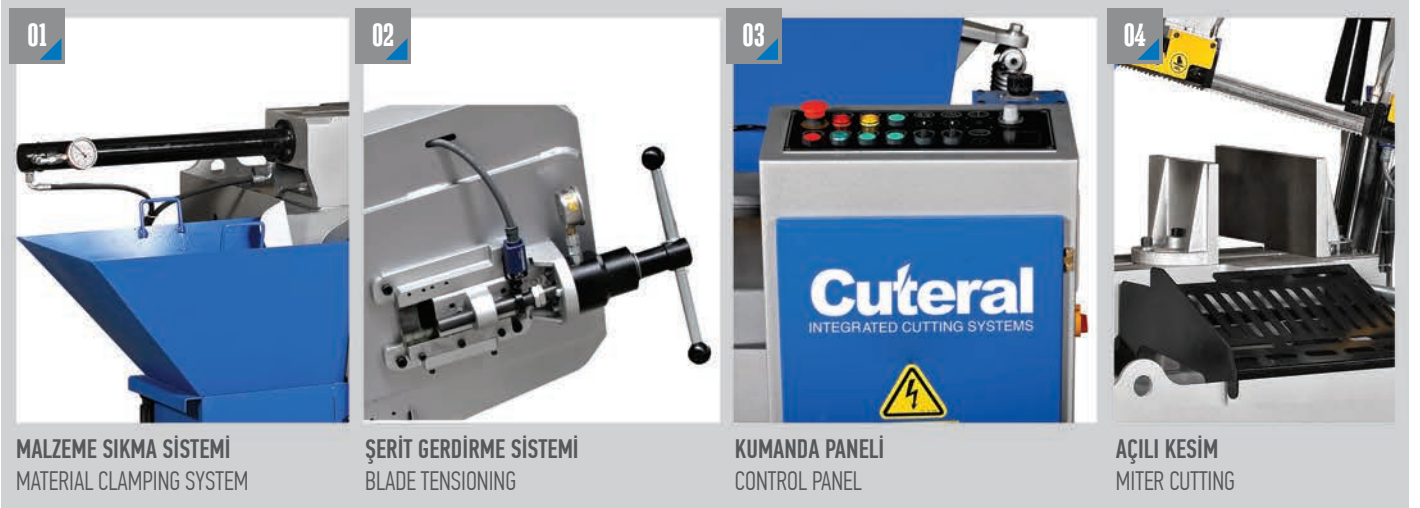YARI OTOMATİK TESTERE TEZGAHI SEMI AUTOMATIC BANDSAW MACHINE



ÖLÇÜLER DIMENSIONS

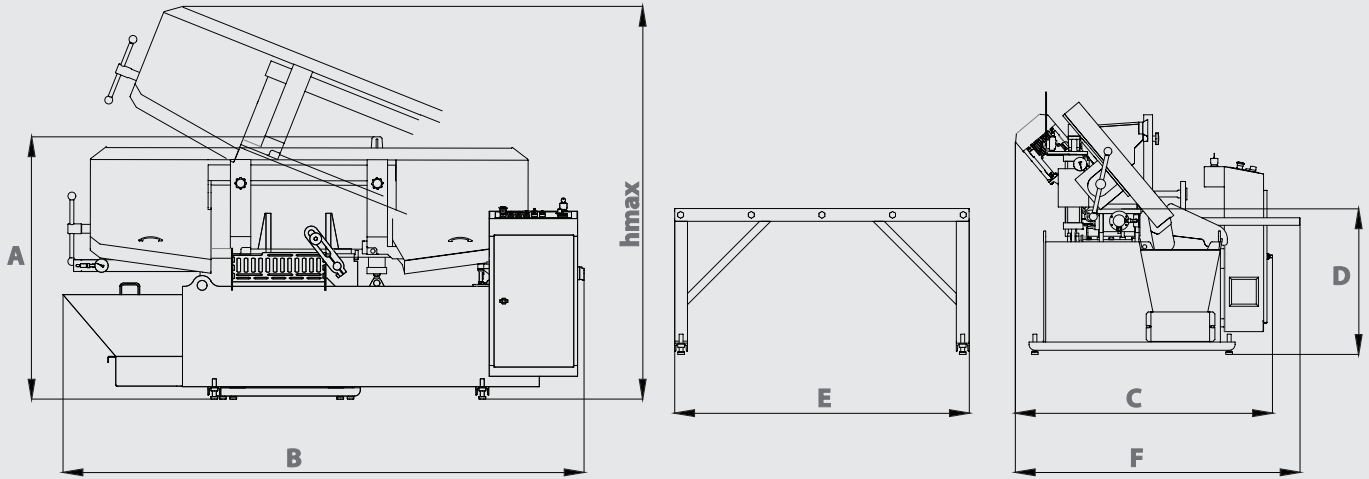MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1335 mm 52.56 inch	B	2655 mm 104.53 inch	C	1310 mm 51.57 inch	D	740 mm 29.13 inch	E	1500 mm 59.06 inch	F	1450 mm 57.09 inch	hmax	2000 mm 78.74 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	-----------------------	---	-----------------------	------	-----------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 41 x 1.3 x 4635 mm 1 1/2 x 0.050 x 182.4 inch	kW Şerit Motoru Blade Motor 4 kW - 1500d/dk 5.36 hp - 1500 rpm	kW Sürücü Motor Feeding Motor Manuel Manual
kW Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm	kW H ₂ O Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 4.87 kW 6.53 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	KG LBS Ağırlık Weight 1174 kg 2588 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

Kesim Kapasitesi Cutting Capacity 350 mm 13.78 inch	Kesim Kapasitesi Cutting Capacity 400 mm 15.75 inch	mm inch 60°	300 mm 11.81 inch	350 mm 13.78 inch	350 mm 13.78 inch	30°	0°	10°	15°	20°
280 x 280 mm 11.02 x 11.02 inch	350 x 350 mm 13.78 x 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	260 x 350 mm 10.24 x 13.78 inch	210 x 400 mm 8.27 x 15.75 inch	200 x 300 mm 7.87 x 11.81 inch	280 x 280 mm 11.02 x 11.02 inch	350 x 350 mm 13.78 x 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	350 x 350 mm 13.78 x 13.78 inch

PSM 420 / 600 M

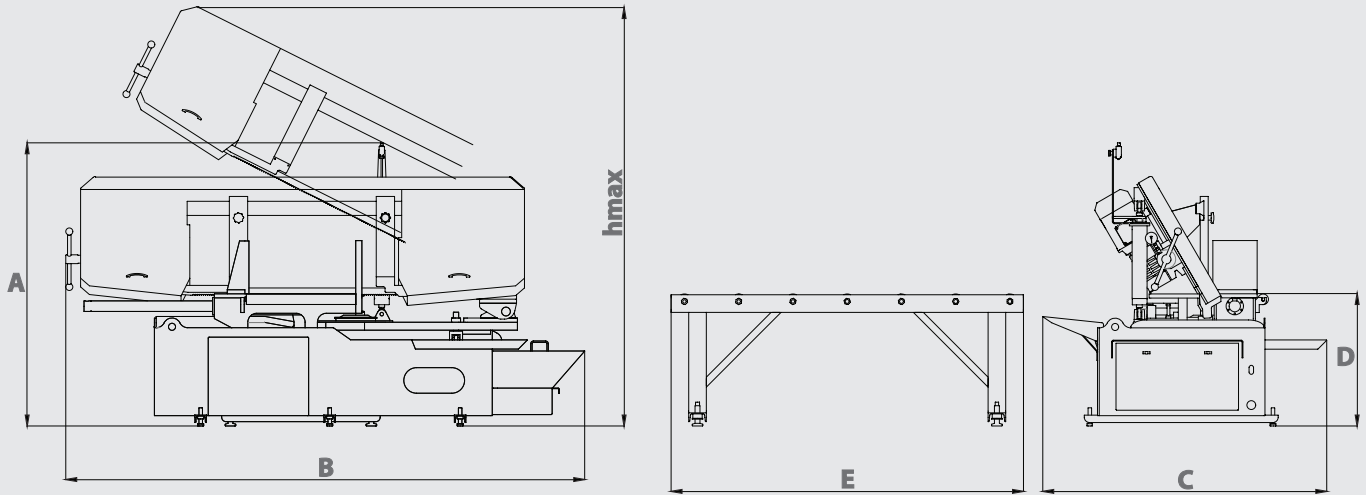


YARI OTOMATİK AÇILI TESTERE TEZGAHI SEMI AUTOMATIC MITER BANDSAW MACHINE



ÖLÇÜLER DIMENSIONS

MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1610 mm 63.39 inch	B	2920 mm 114.96 inch	C	1615 mm 63.58 inch	D	750 mm 29.53 inch	E	2000 mm 78.74 inch	hmax	2380 mm 93.70 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	-----------------------	------	-----------------------


Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 41 x 1.3 x 5280 mm 1 1/2 x 0.050 x 207.8 inch	Şerit Motoru Blade Motor 4 kW - 1500d/dk 5.36 hp - 1500 rpm	Sürücü Motor Feeding Motor Manuel Manual
Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm	Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 4.87 kW 6.53 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	Ağırlık Weight 1454 kg 3205 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

90°	60°	45°	30°	0°	15°	45°	60°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	330 mm 12.99 inch	420 mm 16.54 inch	420 mm 16.54 inch	420 mm 16.54 inch		
420 mm 16.54 inch	600 mm 23.62 inch	270 x 270 mm 10.63 x 10.63 inch	420 x 420 mm 16.54 x 16.54 inch	420 x 420 mm 16.54 x 16.54 inch	420 x 420 mm 16.54 x 16.54 inch		
		190 x 310 mm 7.48 x 12.20 inch	250 x 500 mm 9.84 x 19.69 inch	420 x 600 mm 16.54 x 23.62 inch	420 x 600 mm 16.54 x 23.62 inch		

PSM 440 / 610 DM NC






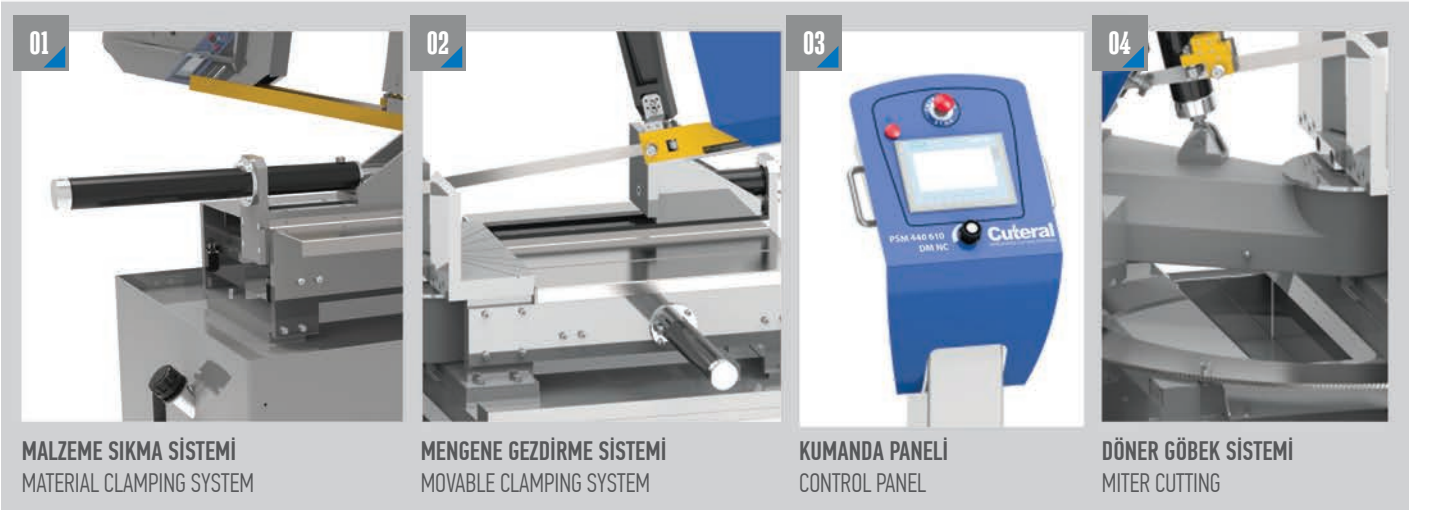YARI OTOMATİK ÇİFT YÖN AÇILI TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE MITER BANDSAW MACHINE








ÖLÇÜLER DIMENSIONS

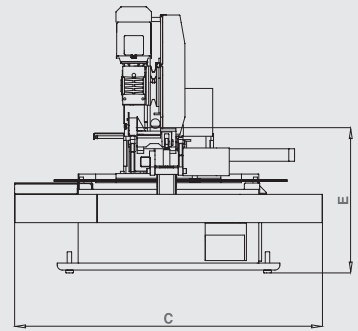
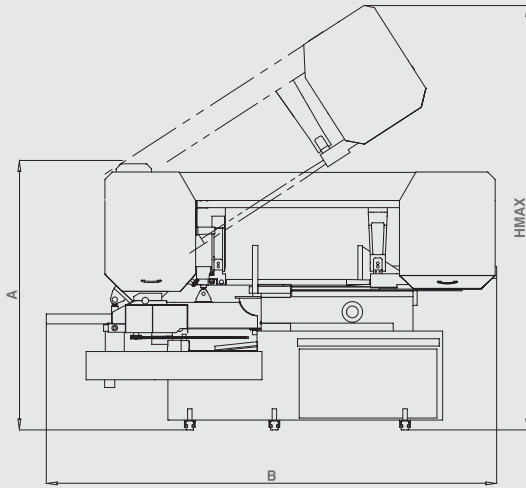
MAFSALLI MODELLER PIVOT TYPES



TEKNİK ÖZELLİKLER TECHNICAL FEATURES


A	1600 mm 62.99 inch	B	2850 mm 112.20 inch	C	1870 mm 73.22 inch	D	2000 mm 78.74 inch	E	860 mm 33.86 inch	hmax	2535 mm 99.80 inch
---	-----------------------	---	------------------------	---	-----------------------	---	-----------------------	---	----------------------	------	-----------------------

	Otomatik Automatic		Şerit Ölçüsü Blade Dimension 34 x 1,1 x 5100 mm 1 1/4 x 0,042 x 200,7 inch		Şerit Motoru Blade Motor 4 kW - 1500 d/dk 5.36 hp - 1500 rpm		Sürücü Motor Feeding Motor Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 0.5 hp - 1400 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 4.87 kW 6.53 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min		Ağırlık Weight 1680 kg 3703 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●	250 mm 9.84 inch	400 mm 15.75 inch	440 mm 17.32 inch	440 mm 17.32 inch	440 mm 17.32 inch	400 mm 15.75 inch	260 mm 10.24 inch
440 mm 17.32 inch	610 mm 24.02 inch	■	250 x 250 mm 9.84 x 9.84 inch	380 x 380 mm 14.96 x 14.96 inch	440 x 440 mm 17.32 x 17.32 inch	440 x 440 mm 17.32 x 17.32 inch	440 x 440 mm 17.32 x 17.32 inch	380 x 400 mm 14.96 x 15.75 inch	260 x 260 mm 10.24 x 10.24 inch
		■	440 x 240 mm 17.32 x 9.45 inch	380 x 400 mm 14.96 x 15.75 inch	440 x 500 mm 17.32 x 19.69 inch	440 x 610 mm 17.32 x 24.02 inch	440 x 500 mm 17.32 x 19.69 inch	380 x 400 mm 14.96 x 15.75 inch	440 x 240 mm 17.32 x 9.45 inch




PSM 440 700 DM LİTE

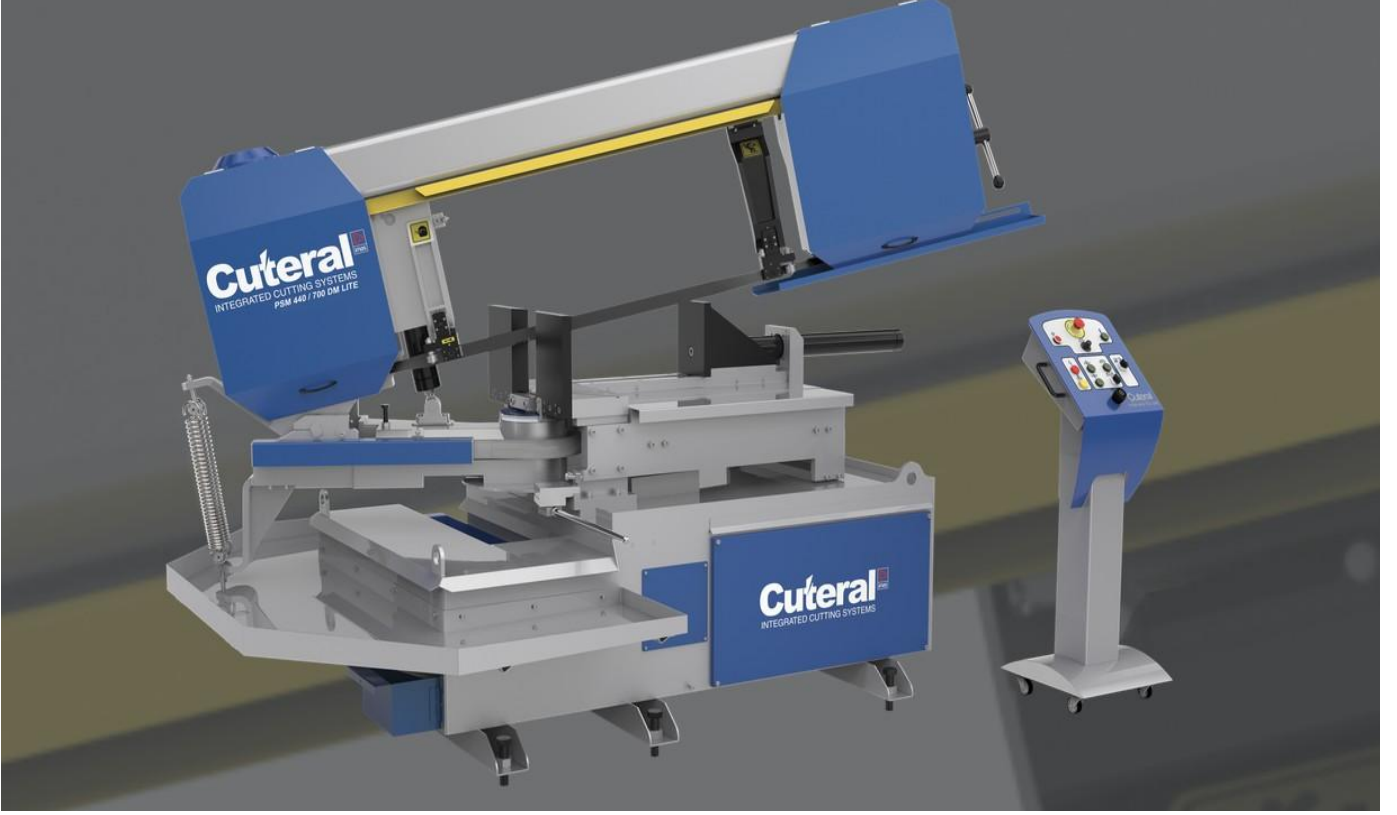Testere Tezgahı









1440 700 DM LITE

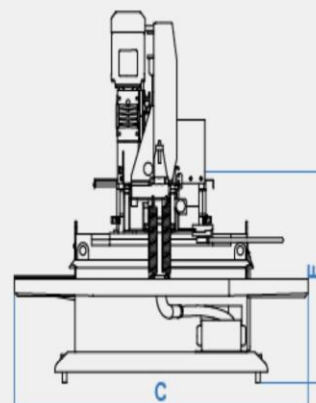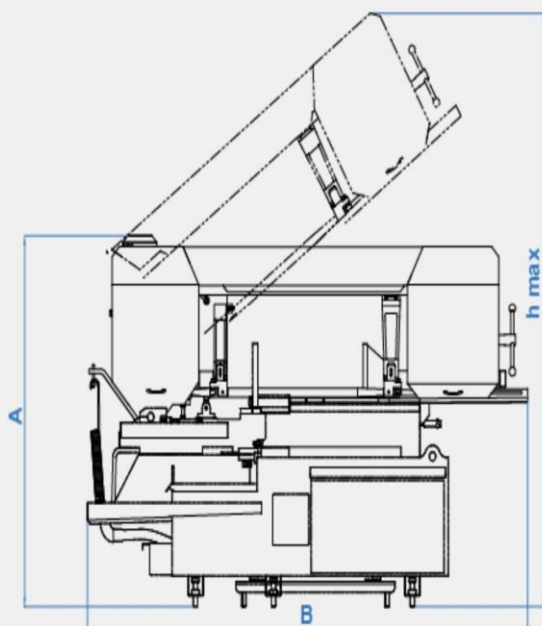TEKNİK ÖZELLİKLER



A	1690 mm	B	2800 mm	C	1870 mm	D	1980 mm	E	950 mm	hmax	2690 mm
	66.14 inch		110.24 inch		73.62 inch		77.95 inch		37.40 inch		105.91 inch

 Yanı Otomatik Semi Automatic	 Şerit Ölçüsü Blade Dimension 41 x 1.3 x 5270 mm 1 1/2 x 0.050 x 207.5 inch	 Şerit Motoru Blade Motor 4 kW - 1500 d/d 5.36 hp - 1500 rpm	 Sürücü Motor Feeding Motor Manuel Manuel
 Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 0.5 hp - 1400 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	 Voltaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 4.87 kW 6.53 hp
 Kesme Hızı Cutting Speed 15 m/dk - 100 m/dk 49 m/dk - 328 ft/min	 Ağırlık Weight 1750 kg 3800 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

 90°		mm inch							
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●	340 mm 13.38 inch	440 mm 17.32 inch	440 mm 17.32 inch	440 mm 17.32 inch	440 mm 17.32 inch	440 mm 17.32 inch	340 mm 13.38 inch
		■	330 mm 12.99 inch	430 mm 16.92 inch	440 mm 17.32 inch	440 mm 17.32 inch	440 mm 17.32 inch	430 mm 16.92 inch	330 mm 12.99 inch
440 mm 17.32 inch	700 mm 27.55 inch	■	330 x 330 mm 12.99 x 12.99 inch	380 x 500 mm 14.96 x 19.68 inch	440 x 600 mm 17.32 x 23.62 inch	440 x 700 mm 17.32 x 27.55 inch	440 x 600 mm 17.32 x 23.62 inch	380 x 500 mm 14.96 x 19.68 inch	330 x 330 mm 12.99 x 12.99 inch