


CAB 550 PLC




TAM OTOMATİK PLC KONTROLLÜ HİDROLİK SÜTUNLU TESTERE TEZGAHI FULL AUTOMATIC PLC CONTROL DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

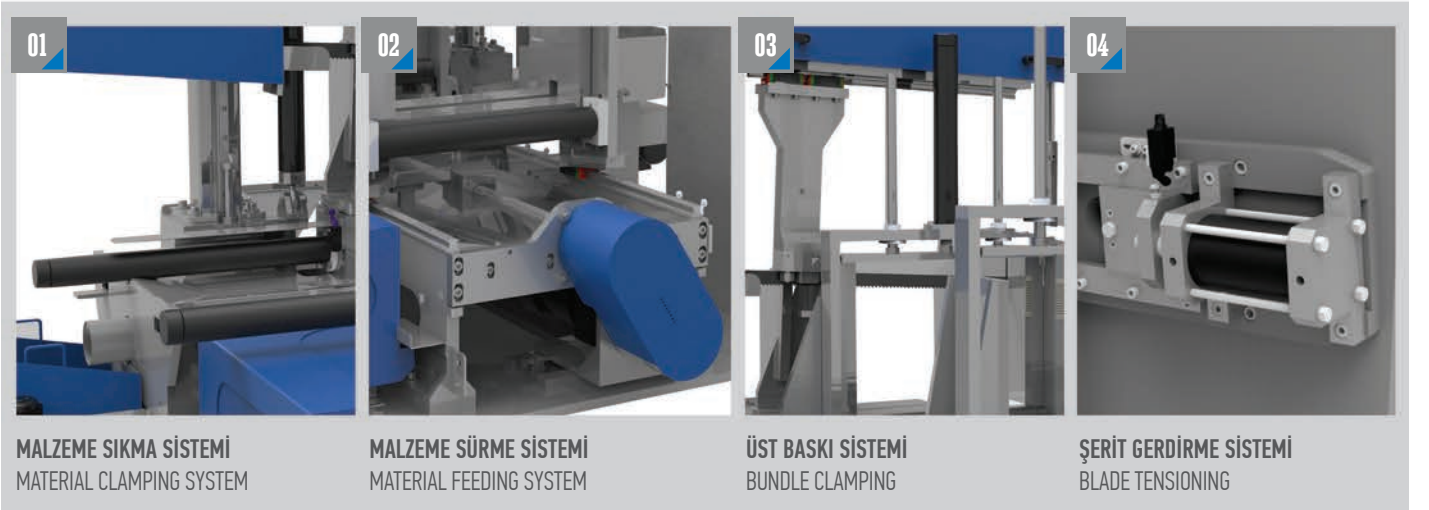

ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

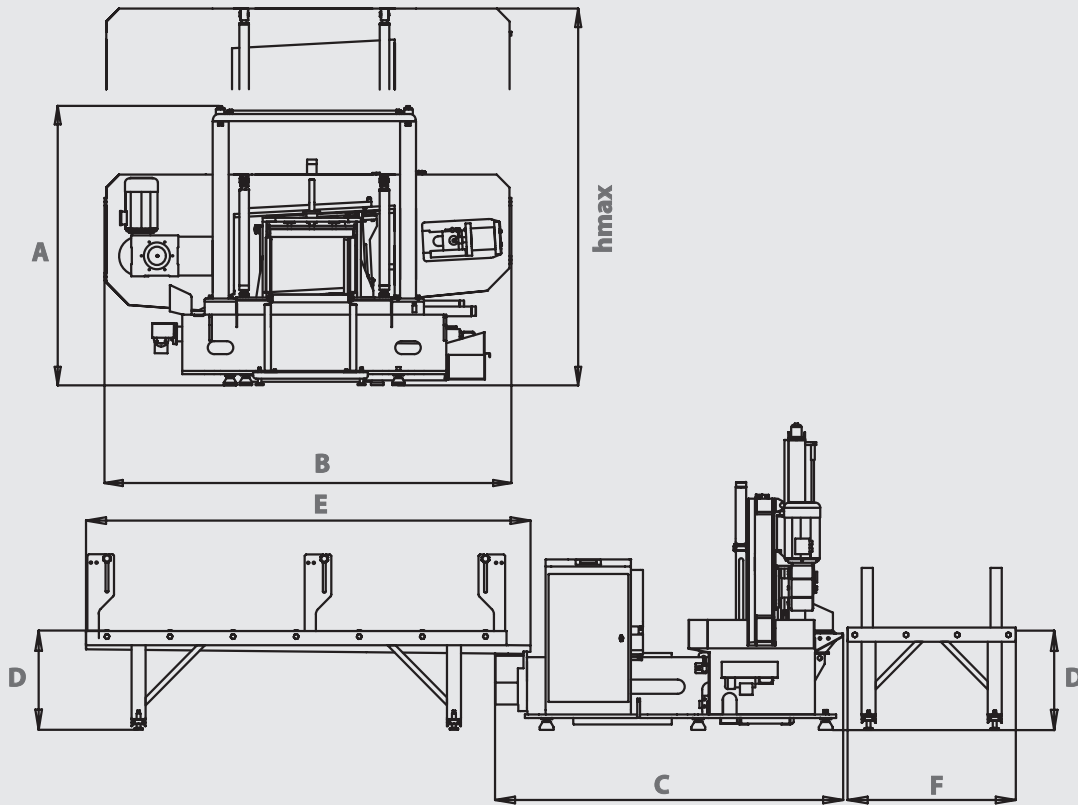

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	2155 mm 84.84 inch	B	3190 mm 125.59 inch	C	2320 mm 91.34 inch	D	700 mm 27.56 inch	E	3170 mm 124.80 inch	F	1200 mm 47.24 inch	hmax	2770 mm 109.06 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	------------------------	---	-----------------------	------	------------------------


PLC	Otomatik Automatic	Şerit Ölçüsü Blade Dimension 41 x 1.3 x 6780 mm 1 1/2 x 0.050 x 266.9 inch	Şerit Motoru Blade Motor 4 kW - 1500 d/dk 5.36 hp - 1500 rpm	Sürücü Motor Feeding Motor 1.5 kW - 1500 d/dk 2 hp - 1500 d/dk
kW OIL	Hidrolik Motor Hydraulic Pump Motor 3 kW - 1500 d/dk 4 hp - 1500 rpm	kW H ₂ O	Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	Ağırlık Weight 4380 kg 9655 lbs	Talas Konveyörü M Chip Conv. M. 0.25 kW - 1500 d/dk 0.33 hp - 1500 rpm	Maksimum Güç Maximum Power 8.96 kW 12 hp	Talaş Fırçası M. Chip Brush M. 0.09 kW - 1500 d/dk 0.12 hp - 1500 rpm

Kesim Kapasitesi Cutting Capacity 550 mm 21.65 inch	Kesim Kapasitesi Cutting Capacity 550 mm 21.65 inch	mm inch	60°	45°	30°	0°	106°	45°	30°
550 mm 21.65 inch	550 mm 21.65 inch	550 mm 21.65 inch	550 x 550 mm 21.65 x 21.65 inch	550 x 550 mm 21.65 x 21.65 inch	550 x 550 mm 21.65 x 21.65 inch	550 x 550 mm 21.65 x 21.65 inch	550 x 550 mm 21.65 x 21.65 inch	550 x 550 mm 21.65 x 21.65 inch	550 x 550 mm 21.65 x 21.65 inch

CAR 400




TAM OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI FULL AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

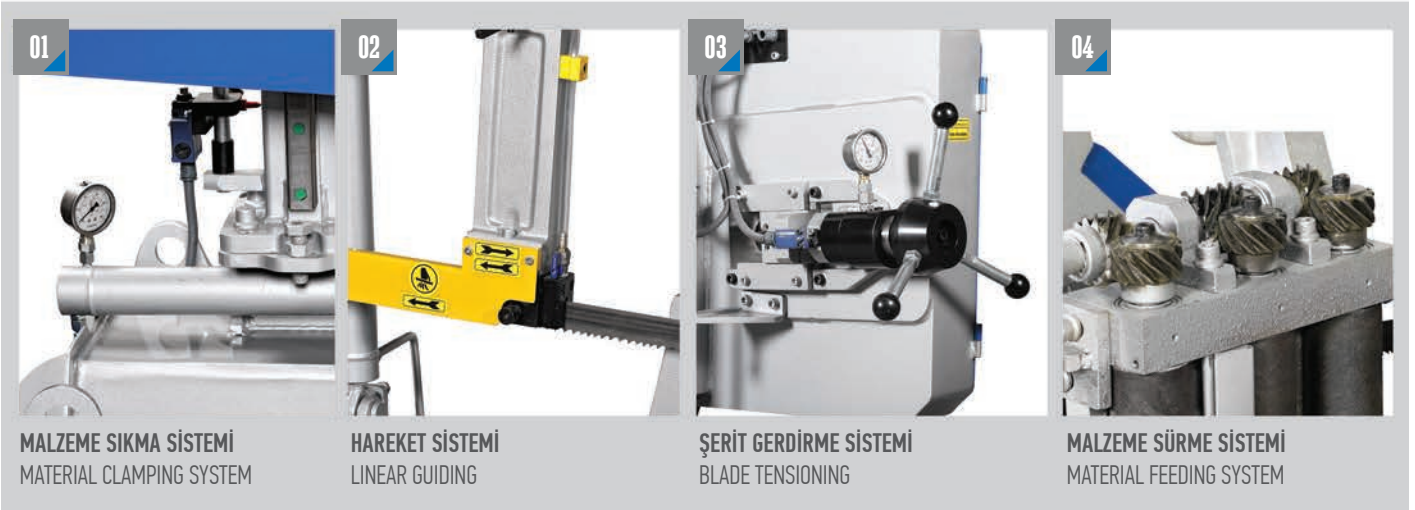





ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

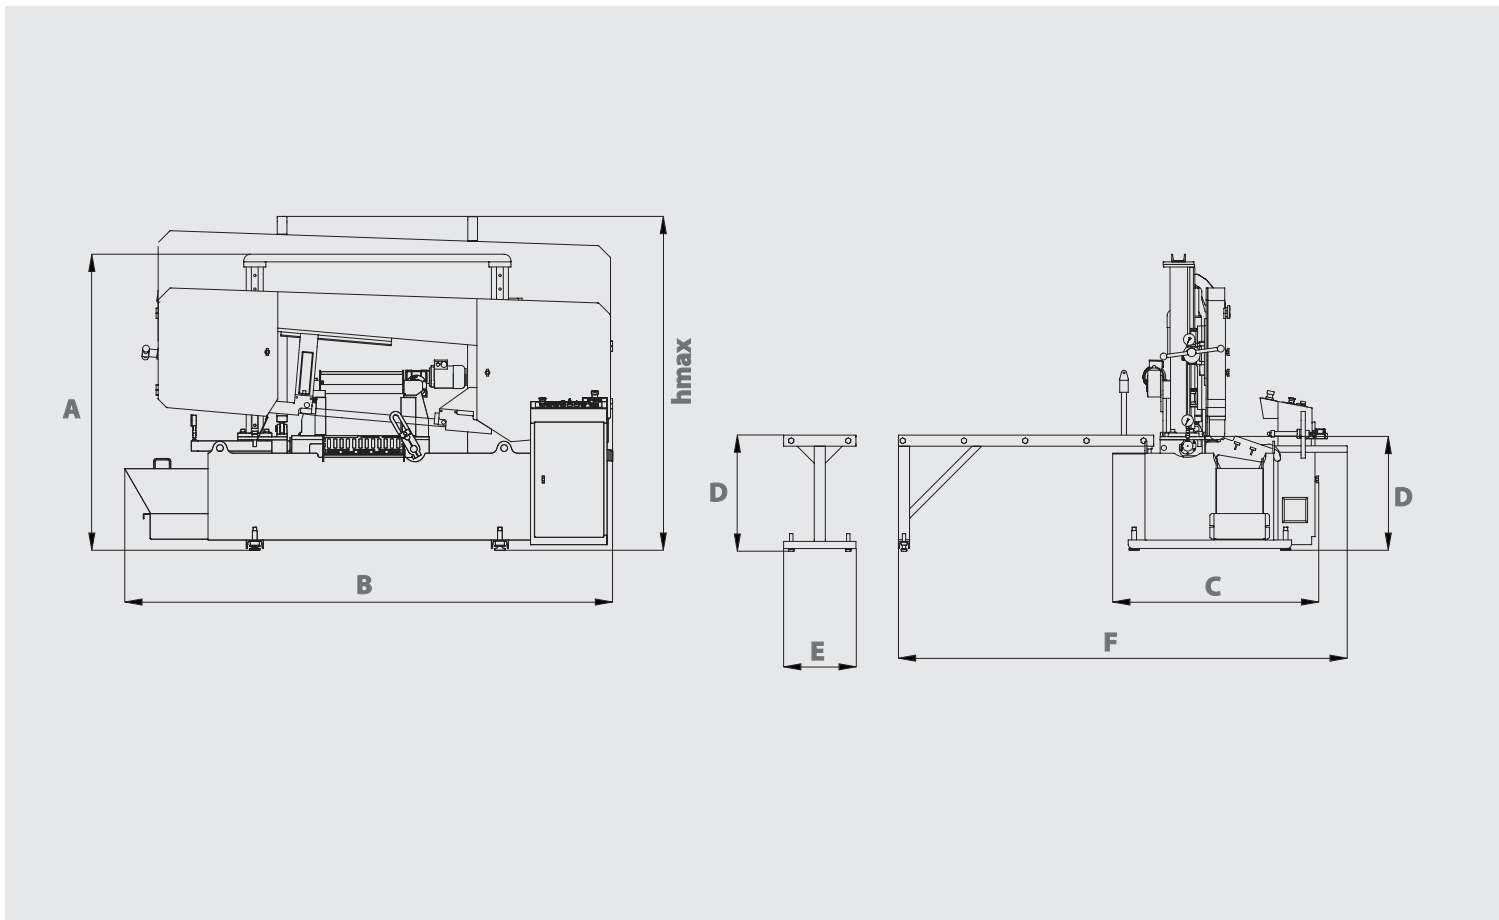

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1740 mm 68.50 inch	B	2870 mm 112.99 inch	C	1376 mm 54.17 inch	D	670 mm 26.38 inch	E	425 mm 16.73 inch	F	2640 mm 103.94 inch	hmax	1965 mm 77.36 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	----------------------	---	------------------------	------	-----------------------

	Otomatik Automatic		Şerit Ölçüsü Blade Dimension 41 x 1.3 x 5715 mm 1 1/2 x 0.050 x 225 inch		Şerit Motoru Blade Motor 4 kW - 1000d/dk 5.36 hp - 1000 rpm		Sürücü Motor Feeding Motor 0.37 kW - 925 d/dk 0.49 hp - 925 d/dk
	Hidrolik Motor Hydraulic Pump Motor 0.37 kW - 1500 d/dk 0.5 hp - 1500 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 4.74 kW 6.35 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min		Ağırlık Weight 1250 kg 2755 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

		90°		mm inch									
Kesim Kapasitesi	Kesim Kapasitesi			● ●				400 mm					
Cutting Capacity	Cutting Capacity			■ ■				15.75 inch					
400 mm	440 mm							400 x 400 mm					
15.75 inch	17.32 inch							15.75 x 15.75 inch					
								400 x 450 mm					
								15.75 x 17.72 inch					

CAR 550




TAM OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI FULL AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE



ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

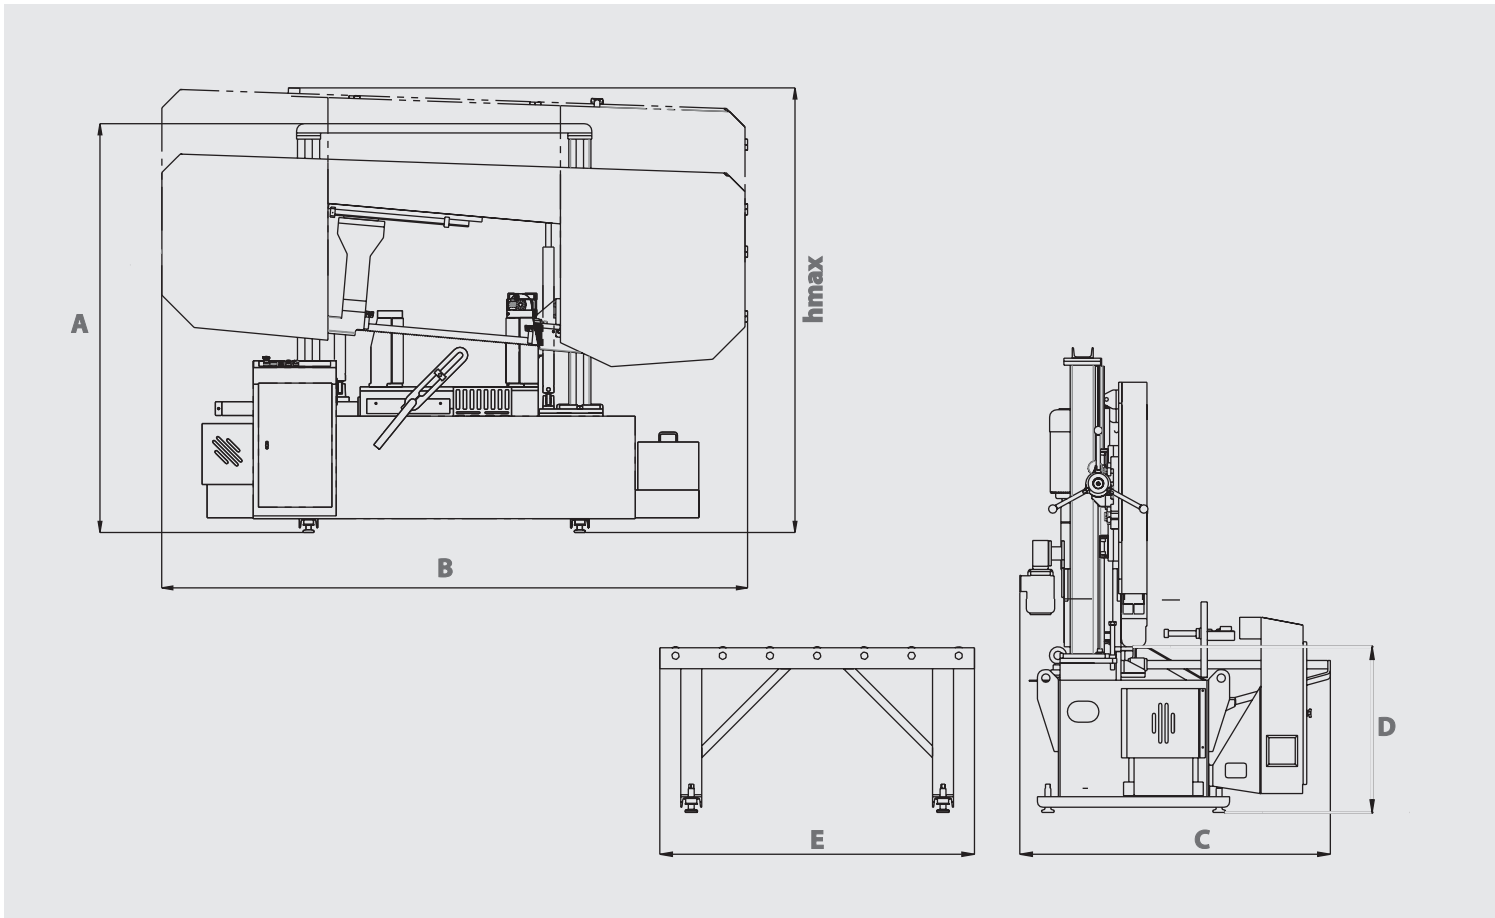

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	2215 mm 87.20 inch	B	3160 mm 124.41 inch	C	1480 mm 58.27 inch	D	790 mm 31.10 inch	E	2000 mm 78.74 inch	hmax	2400 mm 94.49 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	-----------------------	------	-----------------------


Otomatik Automatic	Şerit Ölçüsü Blade Dimension 41 x 1.3 x 6850 mm 1 1/2 x 0.050 x 269.6 inch	Şerit Motoru Blade Motor 4 kW - 1000 d/dk 5.36 hp - 1000 rpm	Sürücü Motor Feeding Motor 0.55 kW - 1000 d/dk 0.73 hp - 1000 d/dk
Hidrolik Motor Hydraulic Pump Motor 1.1 kW - 1500 d/dk 1.48 hp - 1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.77 kW 7.73 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	Ağırlık Weight 2300 kg 5070 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

Kesim Kapasitesi Cutting Capacity 550 mm 21.65 inch	Kesim Kapasitesi Cutting Capacity 550 mm 21.65 inch	90°	60°	45°	30°	0°	30°	45°	60°

CSM 400




YARI OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

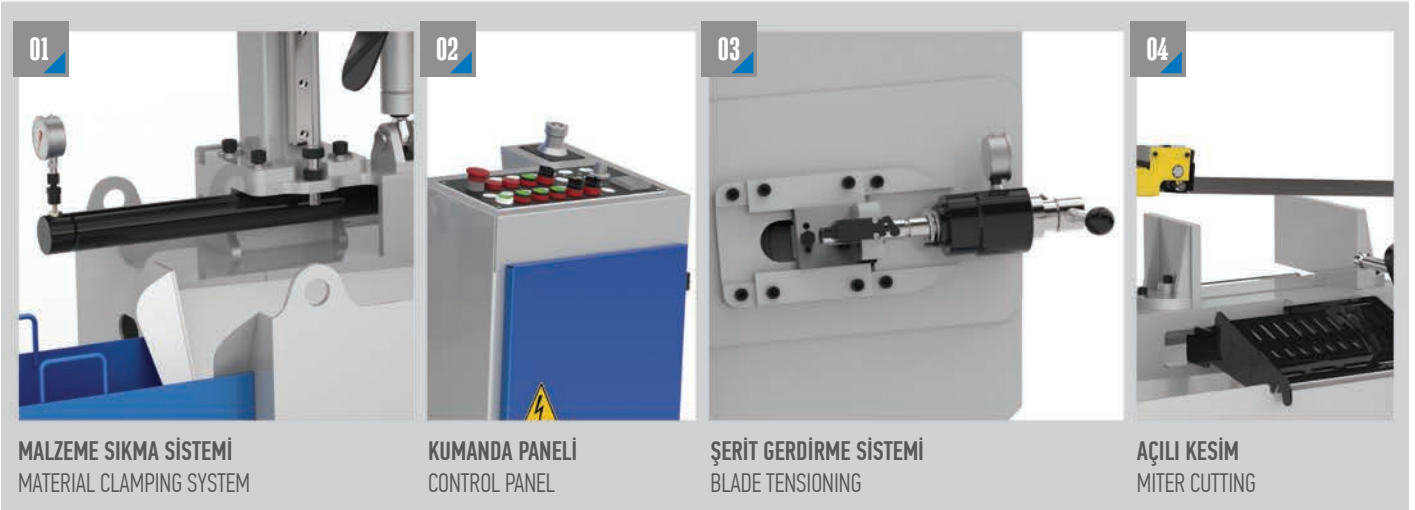






ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

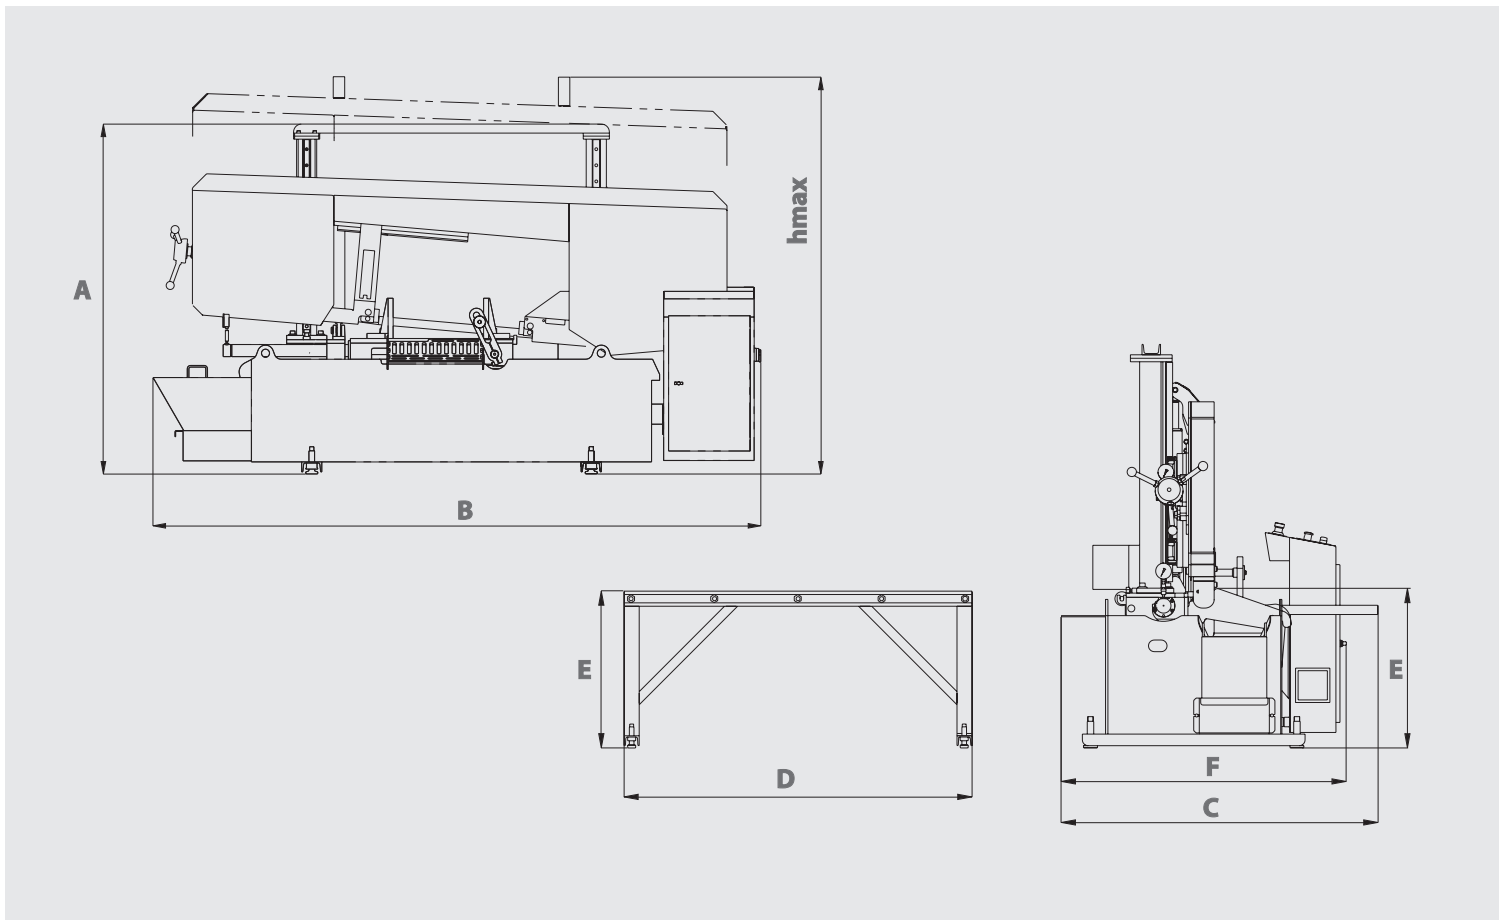

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	1740 mm 68.50 inch	B	3022 mm 118.98 inch	C	1365 mm 53.74 inch	D	1500 mm 59.06 inch	E	675 mm 26.57 inch	F	1228 mm 48.35 inch	hmax	1975 mm 77.76 inch
---	-----------------------	---	------------------------	---	-----------------------	---	-----------------------	---	----------------------	---	-----------------------	------	-----------------------


	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension 41 x 1.3 x 5715 mm 1 1/2 x 0.050 x 225 inch		Şerit Motoru Blade Motor 4 kW - 1500 d/dk 5.36 hp - 1000 rpm		Sürücü Motor Feeding Motor Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor 0.37 kW - 1500 d/dk 0.5 hp - 1500 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 4.49 kW 6.02 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min		Ağırlık Weight 1220 kg 2690 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°		60°		45°		30°		0°		10°		15°		20°
Kesim Kapasitesi Cutting Capacity	400 mm 15.75 inch	Kesim Kapasitesi Cutting Capacity	460 mm 18.11 inch	300 mm 11.81 inch	300 mm 11.81 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 490 mm 15.75 x 19.29 inch	400 x 490 mm 15.75 x 19.29 inch	400 x 490 mm 15.75 x 19.29 inch	400 x 490 mm 15.75 x 19.29 inch

CSM 400 / 800 DM




YARI OTOMATİK ÇİFT YÖN AÇILI HİDROLİK SÜTUNLU TESTERE TEZGAHI
DOUBLE MITER SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

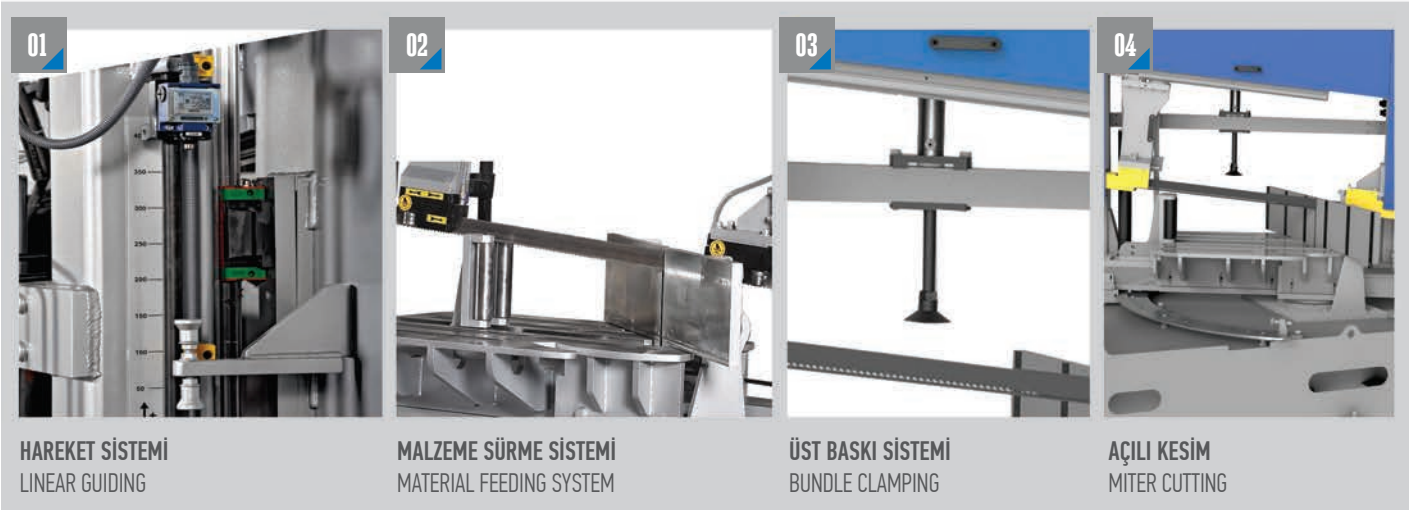

ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

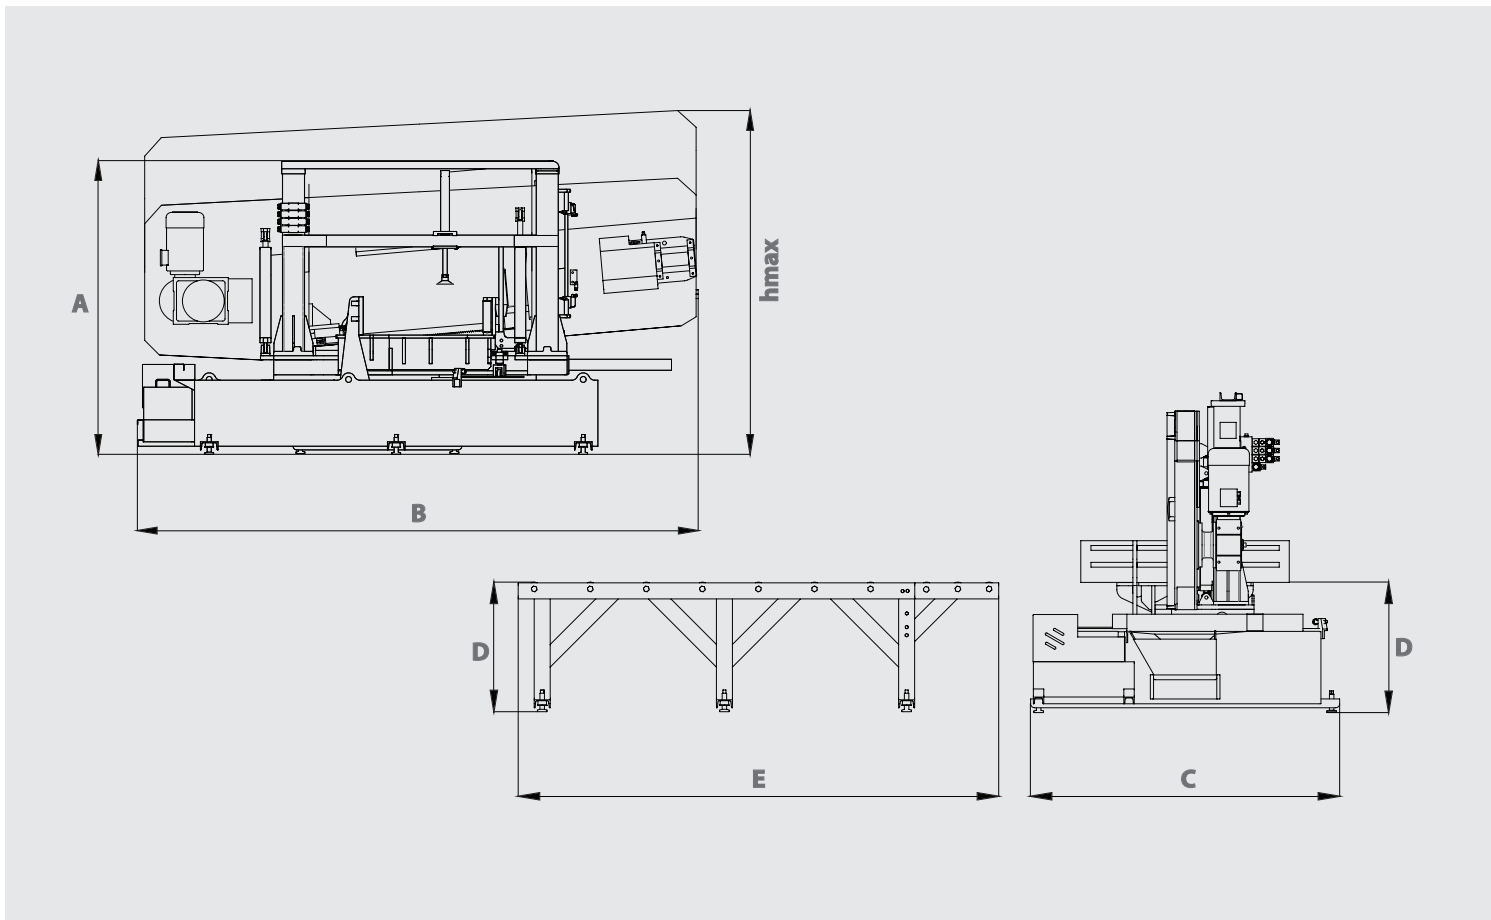

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	2000 mm 78.74 inch	B	3825 mm 150.59 inch	C	1930 mm 75.98 inch	D	815 mm 32.09 inch	E	3000 mm 118.11 inch	hmax	2350 mm 92.52 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	------------------------	------	-----------------------


	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension 54 x 1.6 x 8130 mm 2 x 0.063 x 320 inch		Şerit Motoru Blade Motor 4 kW - 1000d/dk 5.36 hp - 1000 rpm		Sürücü Motor Feeding Motor Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor 1.1 kW - 1500 d/dk 1.48 hp - 1500 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 5.22 kW 7 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min		Ağırlık Weight 3750 kg 8267 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity								
400 mm 15.75 inch	800 mm 31.50 inch								

CSM 550




YARI OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

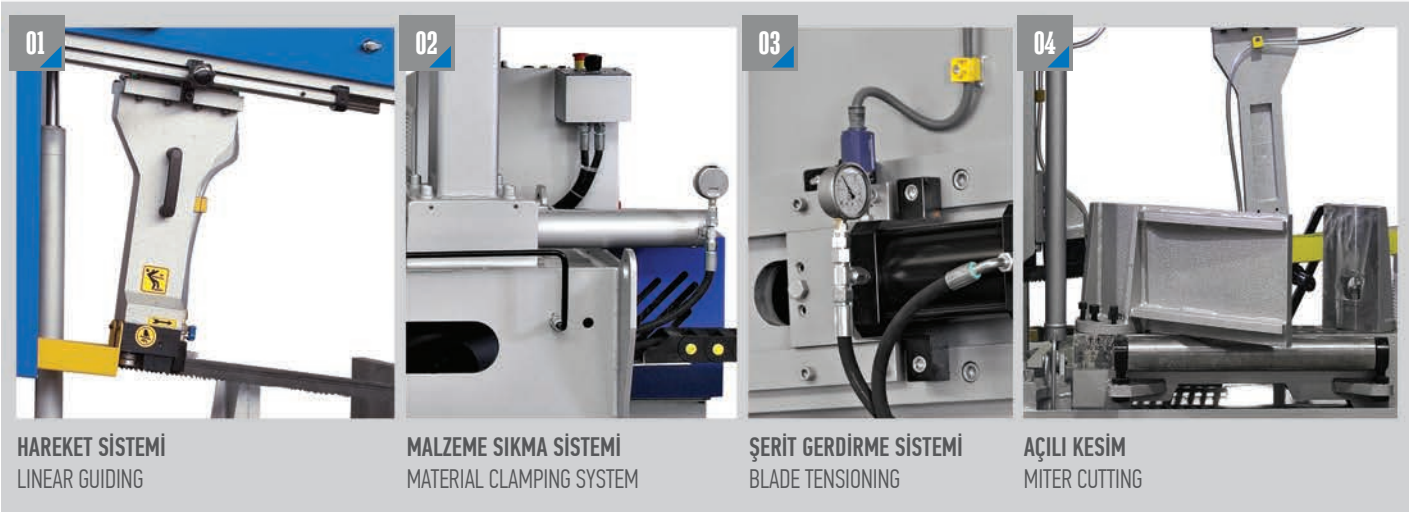






ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

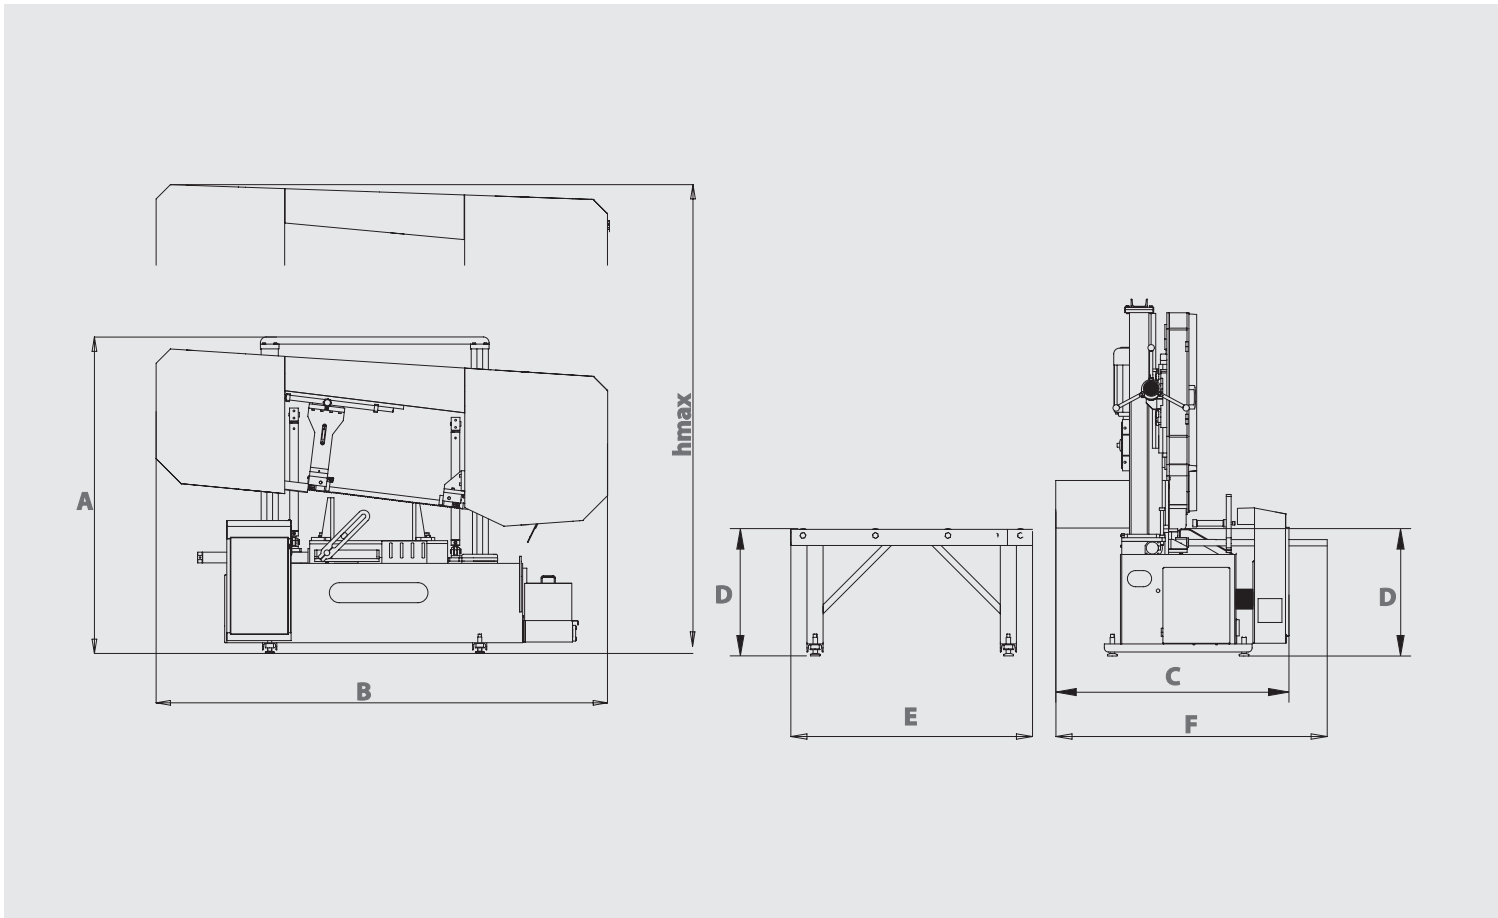

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	2215 mm 87.20 inch	B	3200 mm 125.98 inch	C	1460 mm 57.48 inch	D	765 mm 30.12 inch	E	2000 mm 78.74 inch	F	1690 mm 66.54 inch	hmax	2410 mm 94.88 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	-----------------------	---	-----------------------	------	-----------------------


	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension 41 x 1.3 x 6850 mm 1 1/2 x 0.050 x 269.6 inch		Şerit Motoru Blade Motor 4 kW - 1000 d/dk 5.36 hp - 1000 rpm		Sürücü Motor Feeding Motor Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor 1.1 kW - 1500 d/dk 1.46 hp - 1500 rpm		Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 5.22 kW 7 hp
	Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min		Ağırlık Weight 2100 kg 4620 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●	370 mm 14.57 inch	460 mm 18.11 inch	550 mm 21.65 inch				
550 mm 21.65 inch	600 mm 23.62 inch	■	370 x 370 mm 14.57 x 14.57 inch	460 x 460 mm 18.11 x 18.11 inch	550 x 550 mm 21.65 x 21.65 inch				
		■	550 x 370 mm 21.65 x 14.57 inch	550 x 460 mm 21.65 x 18.11 inch	550 x 600 mm 21.65 x 23.62 inch				

CSM 550 DM



YARI OTOMATİK ÇİFT YÖN AÇILI HİDROLİK SÜTUNLU TESTERE TEZGAHI DOUBLE MITER SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

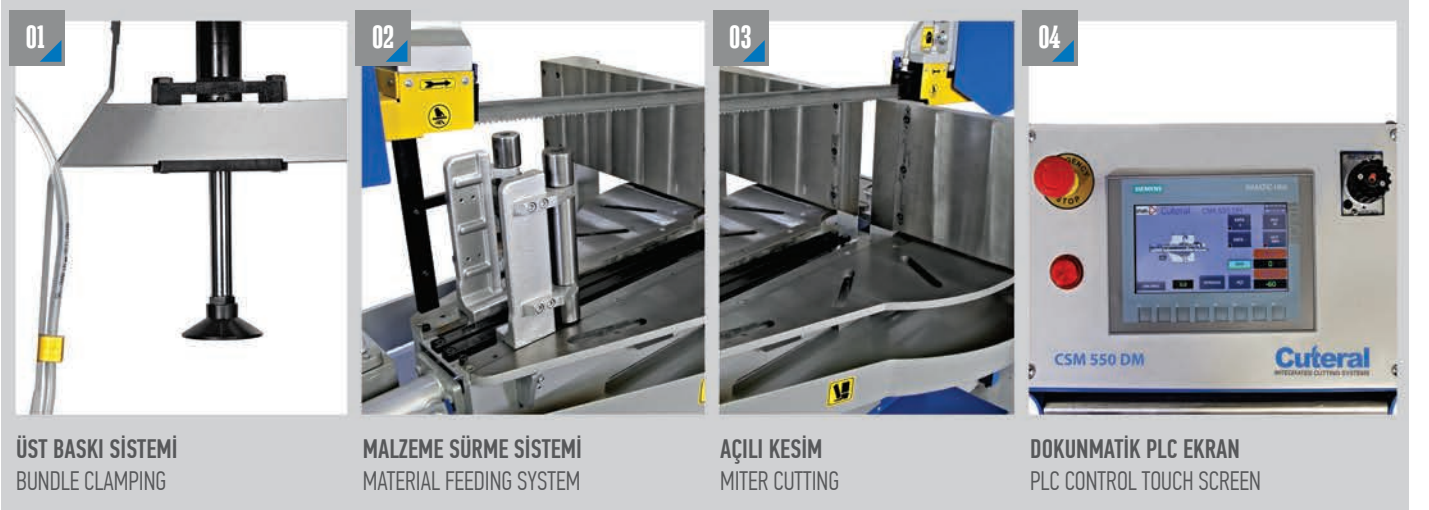

ÜST BASKI SİSTEMİ
BUNDLE CLAMPING


MALZEME SÜRME SİSTEMİ
MATERIAL FEEDING SYSTEM

AÇILI KESİM
MITER CUTTING

DOKUNMATİK PLC EKRAN
PLC CONTROL TOUCH SCREEN






ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

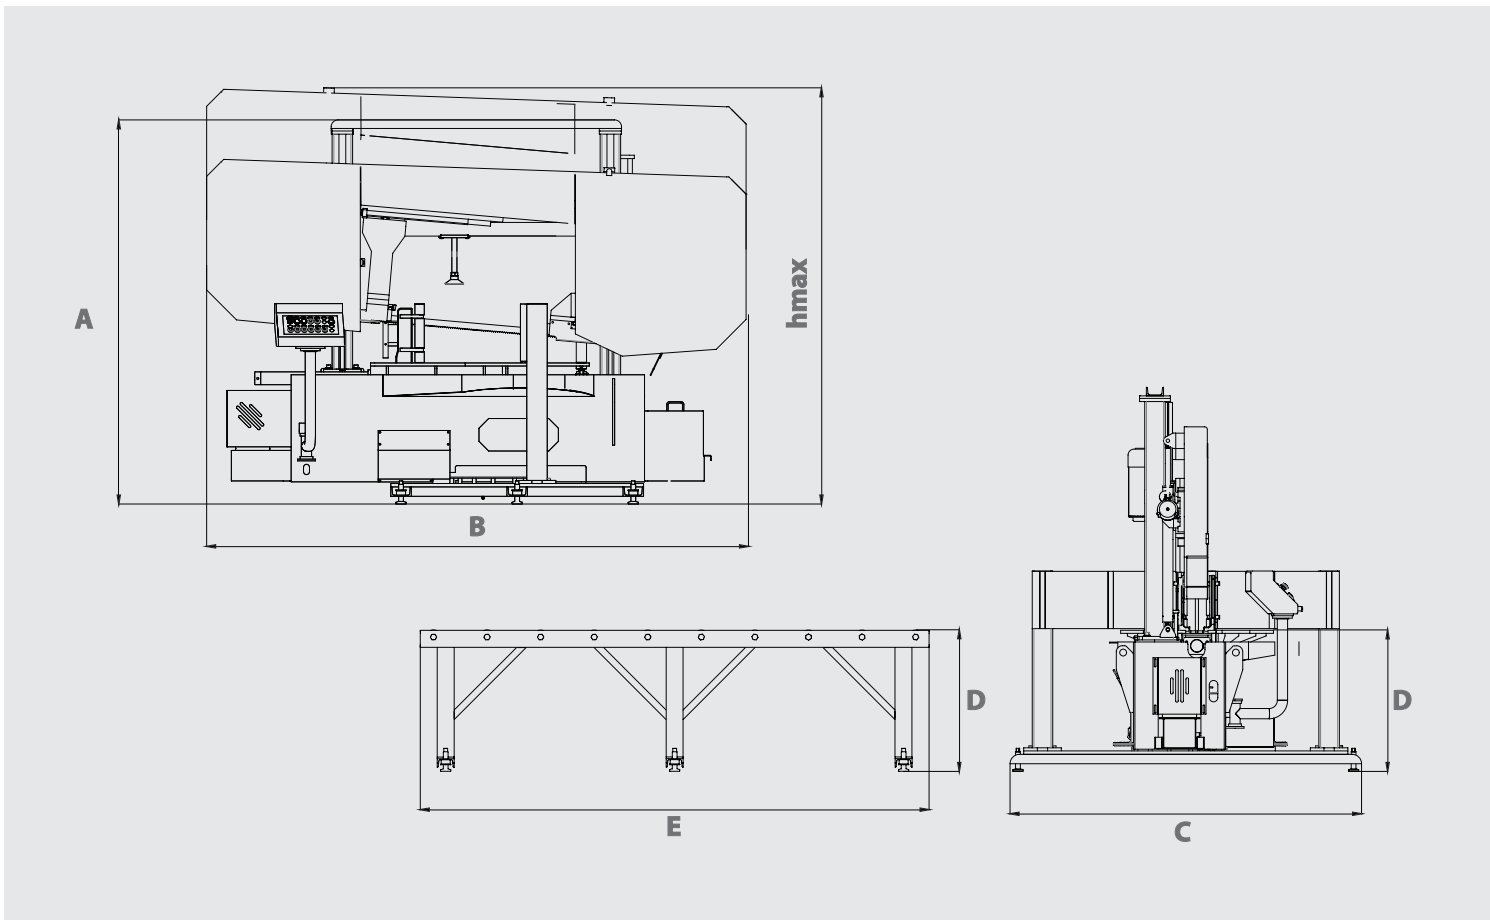

TEKNİK ÖZELLİKLER TECHNICAL FEATURES


A	2250 mm 88.58 inch	B	3160 mm 124.41 inch	C	2058 mm 81.02 inch	D	825 mm 32.48 inch	E	3000 mm 118.11 inch	hmax	2437 mm 95.94 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	------------------------	------	-----------------------

 Yarı Otomatik Semi Automatic	 Şerit Ölçüsü Blade Dimension 41 x 1.3 x 6950 mm 1 1/2 x 0.050 x 269.6 inch	 kW Şerit Motoru Blade Motor 4 kW - 1000 d/dk 5.36 hp - 1000 rpm	 kW Sürücü Motor Feeding Motor Manuel Manual
 kW Hidrolik Motor Hydraulic Pump Motor 1.1 kW - 1500 d/dk 1.48 hp - 1500 rpm	 kW H ₂ O Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	 Voltaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 5.22 kW 7 hp
 Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	 KG LBS Ağırlık Weight 3150 kg 6944 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic





Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	mm inch	60°	45°	30°	0°	10°	15°	60°
550 mm 21.65 inch	610 mm 24.02 inch	●	200 mm 7.87 inch	350 mm 13.78 inch	460 mm 18.11 inch	550 mm 21.65 inch	460 mm 18.11 inch	350 mm 13.78 inch	
		■	200 x 200 mm 7.87 x 7.87 inch	350 x 350 mm 13.78 x 13.78 inch	460 x 460 mm 18.11 x 18.11 inch	550 x 550 mm 21.65 x 21.65 inch	460 x 460 mm 18.11 x 18.11 inch	350 x 350 mm 13.78 x 13.78 inch	
		■	550 x 200 mm 21.65 x 7.87 inch	550 x 350 mm 21.65 x 13.78 inch	550 x 460 mm 21.65 x 18.11 inch	550 x 550 mm 21.65 x 21.65 inch	550 x 460 mm 21.65 x 18.11 inch	550 x 350 mm 21.65 x 13.78 inch	

CSM 550 SC

Yarı Otomatik Hidrolik Sütunlu Testere Tezgahı

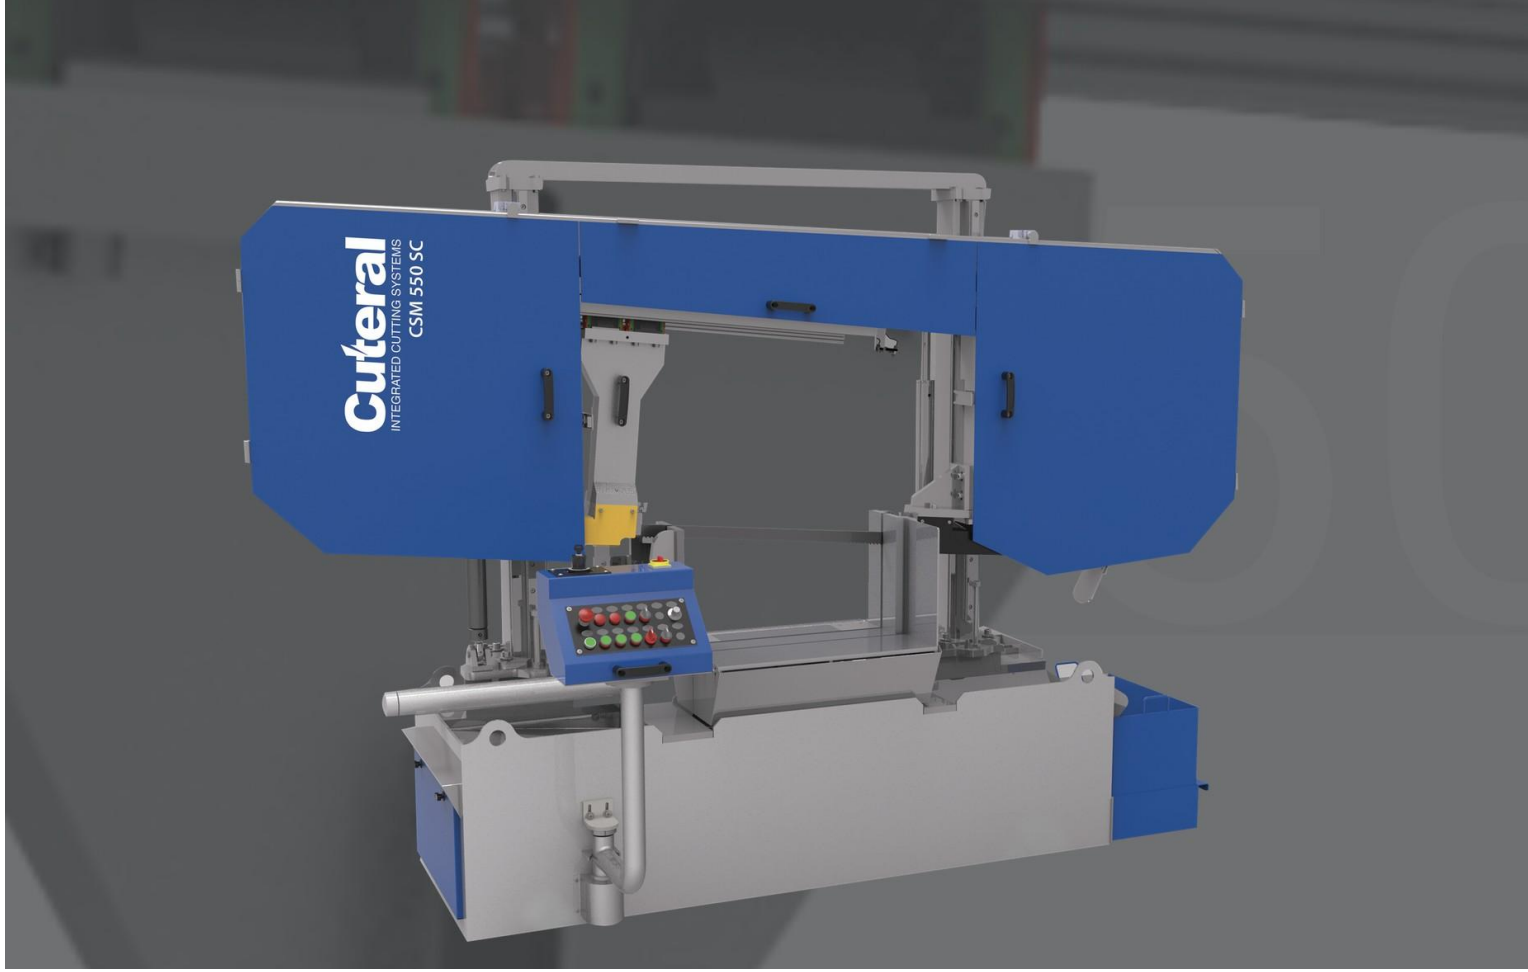

TEKNİK ÖZELLİKLER

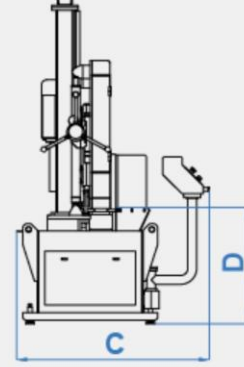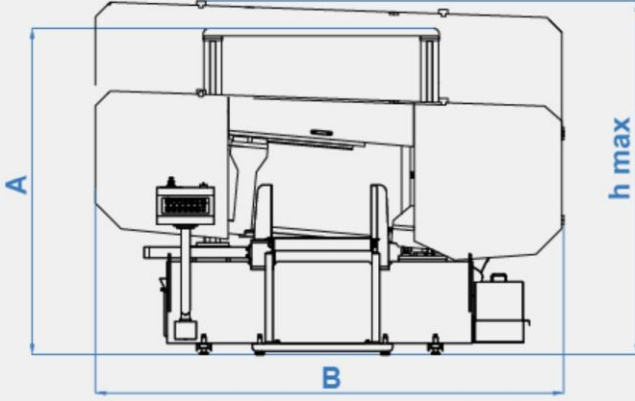


A	2215 mm 87.20 inch	B	3165 mm 124.61 inch	C	1305 mm 51.38 inch	D	790 mm 31.10 inch	E	1725 mm 67.91 inch	F	2000 mm 78.74 inch	hmax	2400 mm 94.49 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	-----------------------	---	-----------------------	------	-----------------------




Yarı Otomatik
Semi Automatic




Şerit Ölçüsü
Blade Dimension
41 x 1.3 x 6850 mm
1 1/2 x 0.050 x 269.6 inch



Şerit Motoru
Blade Motor
4 kW - 1000 d/d
5.36 hp - 1000 rpm



Sürücü Motor
Feeding Motor
Manuel
Manual



Hidrolik Motor
Hydraulic Pump Motor
1.1 kW - 1500 d/dk
1.48 hp - 1500 rpm




Soğutucu Motor
Cooling Liquid Motor
0.12 kW - 3000 d/dk
0.16 hp - 3000 rpm




Voltaj
Voltage
400 V
400 V



Maksimum Güç
Maximum Power
5.22 kW
7 hp



Kesme Hızı
Cutting Speed
15 m/dk - 49 m/dk
100 m/dk - 328 ft/min



Ağırlık
Weight
2200 kg
4850 lbs



Malzeme Sıkma Sistemi
Material Clamping System
Hidrolik
Hydraulic



Şerit Germe Sistemi
Blade Tensioning System
Hidrolik
Hydraulic



90°



mm
inch



Kesim Kapasitesi
Cutting Capacity

Kesim Kapasitesi
Cutting Capacity



550 mm
21.65 inch


650 mm
25.59 inch

550 mm
21.65 inch
550 x 550 mm
21.65 x 21.65 inch
550 x 650 mm
21.65 x 25.59 inch

CSM 800 / 900




YARI OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

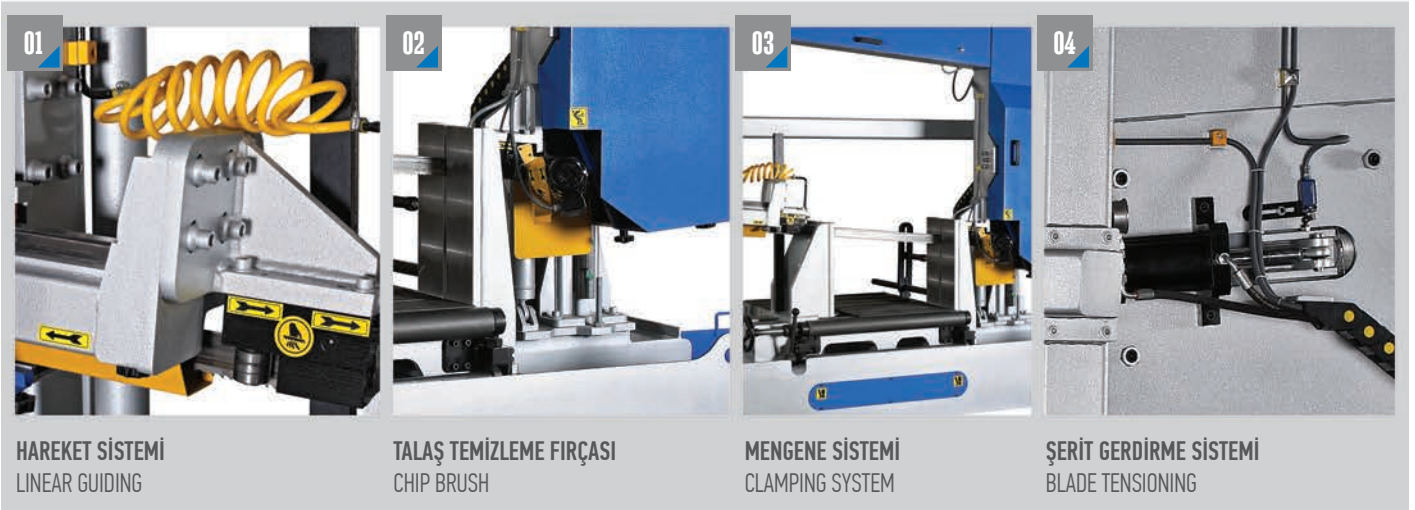

ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

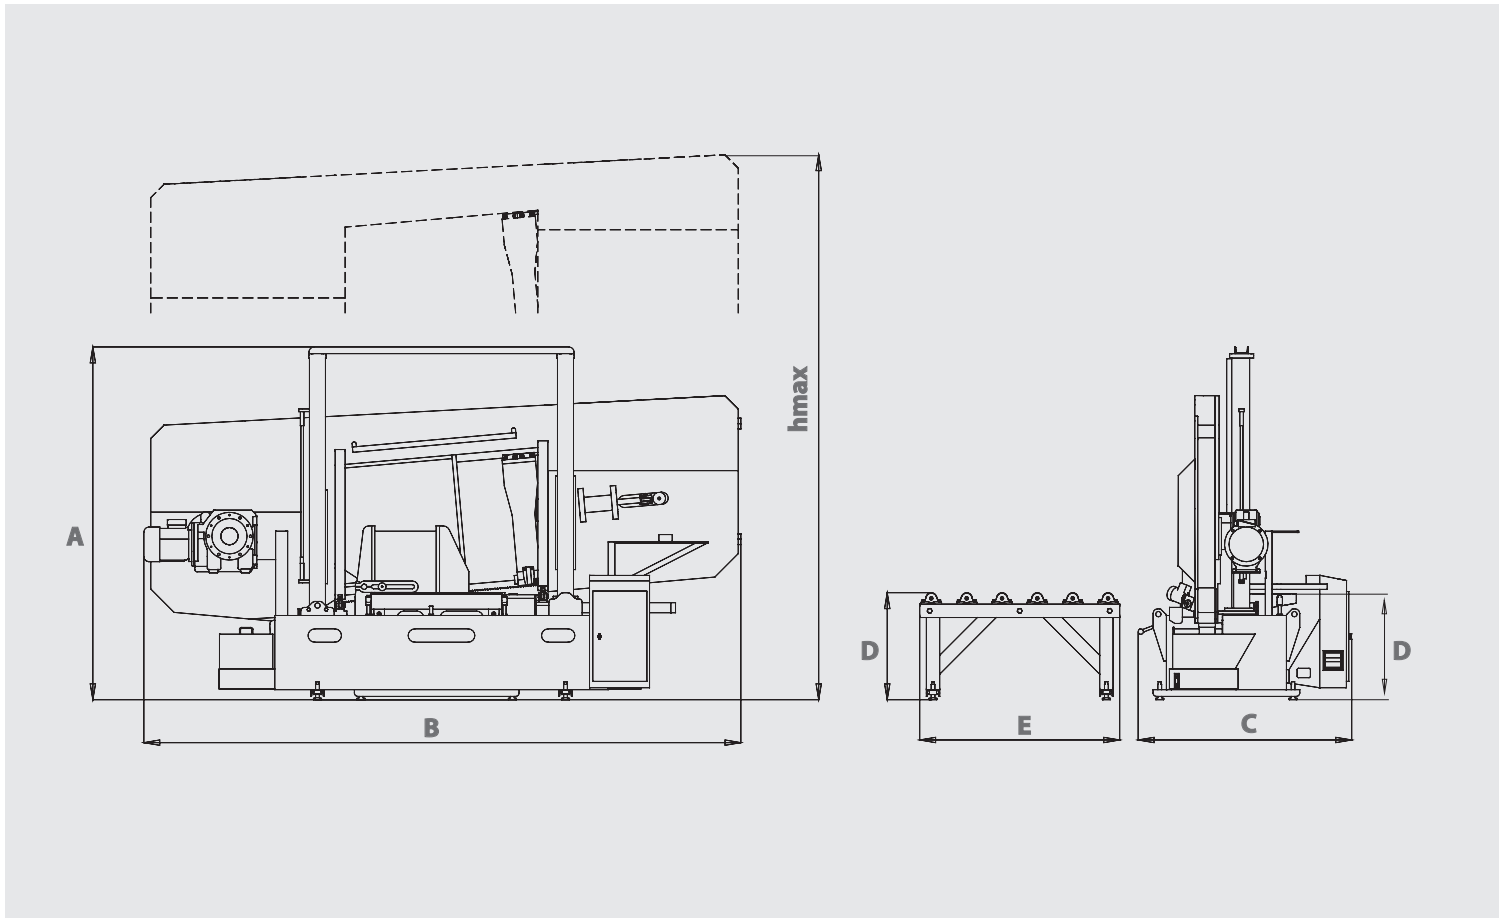

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	2440 mm 96.06 inch	B	4406 mm 173.46 inch	C	1570 mm 61.81 inch	D	610 mm 24.02 inch	E	1500 mm 59.06 inch	hmax	2990 mm 117.72 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	-----------------------	------	------------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 54 x 1.6 x 9800 mm 2.126 x 0.062 x 385.8 inch	Şerit Motoru Blade Motor 5.5 kW - 1500/dk 7.3 hp - 1500 rpm	Sürücü Motor Feeding Motor Manuel Manual
Hidrolik Motor Hydraulic Pump Motor 3 kW - 1500 d/dk 4 hp - 1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 8.71 kW 11.68 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	Ağırlık Weight 3200 kg 7054 lbs	Talaş Fırçası M. Chip Brush M. 0.09 kW - 1500 d/dk 0.12 hp - 1500 rpm	Şerit Germe Sistemi Blade Tensioning System Hidrolik Hydraulic



90°	60°	45°	30°	0°	10°	15°	20°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity						
800 mm 31.50 inch	900 mm 35.43 inch						

CSM 1000 2000 LM

Yarı Otomatik Hidrolik Sütunlu Testere Tezgahı



TEKNİK ÖZELLİKLER

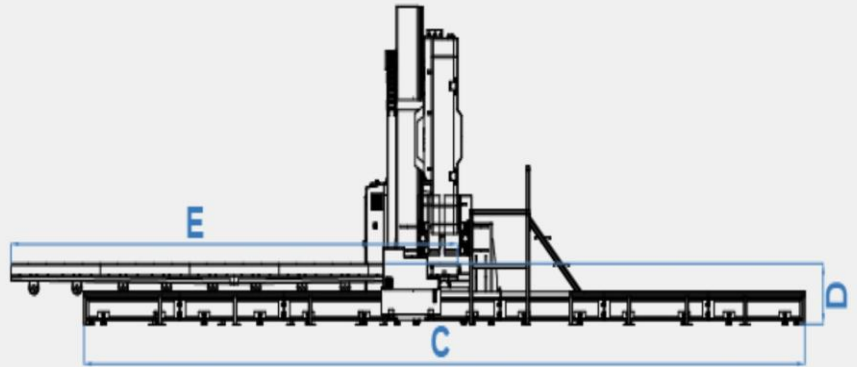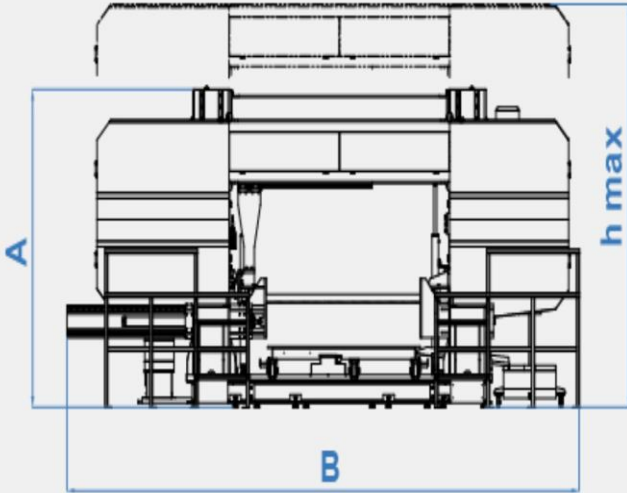

A 2960 mm
116.54 inch






B 6880 mm
270.87 inch

C 96820 mm
3811.81 inch

D 600 mm
23.62 inch

E 6000 mm
236.22 inch

hmax 3540 mm
139.37 inch


	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension		Şerit Motoru Blade Motor		Talaş Konveyör Motoru Chip Conveyor Motor
			80 x 1.6 x 14015 mm 3.15 x 0.063 x 551.77 inch		11 kW - 1500 d/d 14.75 hp - 1500 rpm		0.09 kW - 1500 d/dk 0.12 hp - 1500 rpm
	Hidrolik Motor Hydraulic Pump Motor		Soğutucu Motor Cooling Liquid Motor		Voltaj Voltage		Maksimum Güç Maximum Power
	3 kW - 1500 d/dk 4 hp - 1500 rpm		0.75 kW - 1500 d/dk 1 hp - 1500 rpm		400 V 400 V		15.64 kW 20.97 hp
	Kesme Hızı Cutting Speed		Ağırlık Weight		Malzeme Sıkma Sistemi Material Clamping System		Şerit Germe Sistemi Blade Tensioning System
	15 m/dk - 49 m/dk 60 m/dk - 196 ft/min		18000 kg 39683.20 lbs		Hidrolik Hydraulic		Hidrolik Hydraulic

	90°		mm inch							
Kesim Kapasitesi Cutting Capacity		Kesim Kapasitesi Cutting Capacity					1000 mm 39.37inch			
1000 mm 39.37 inch		2000 mm 78.74 inch					1000 mm 39.37inch			
							1000 x 2050 mm 39.37 x 80.71 inch			

CSM 1200 / 1300




YARI OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

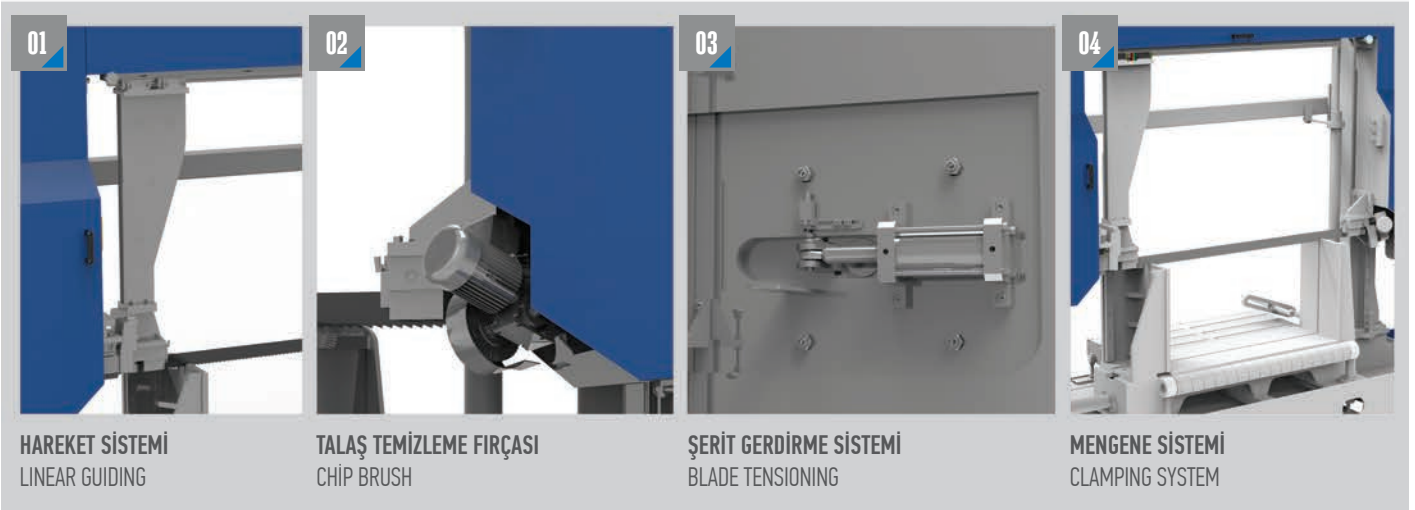

ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

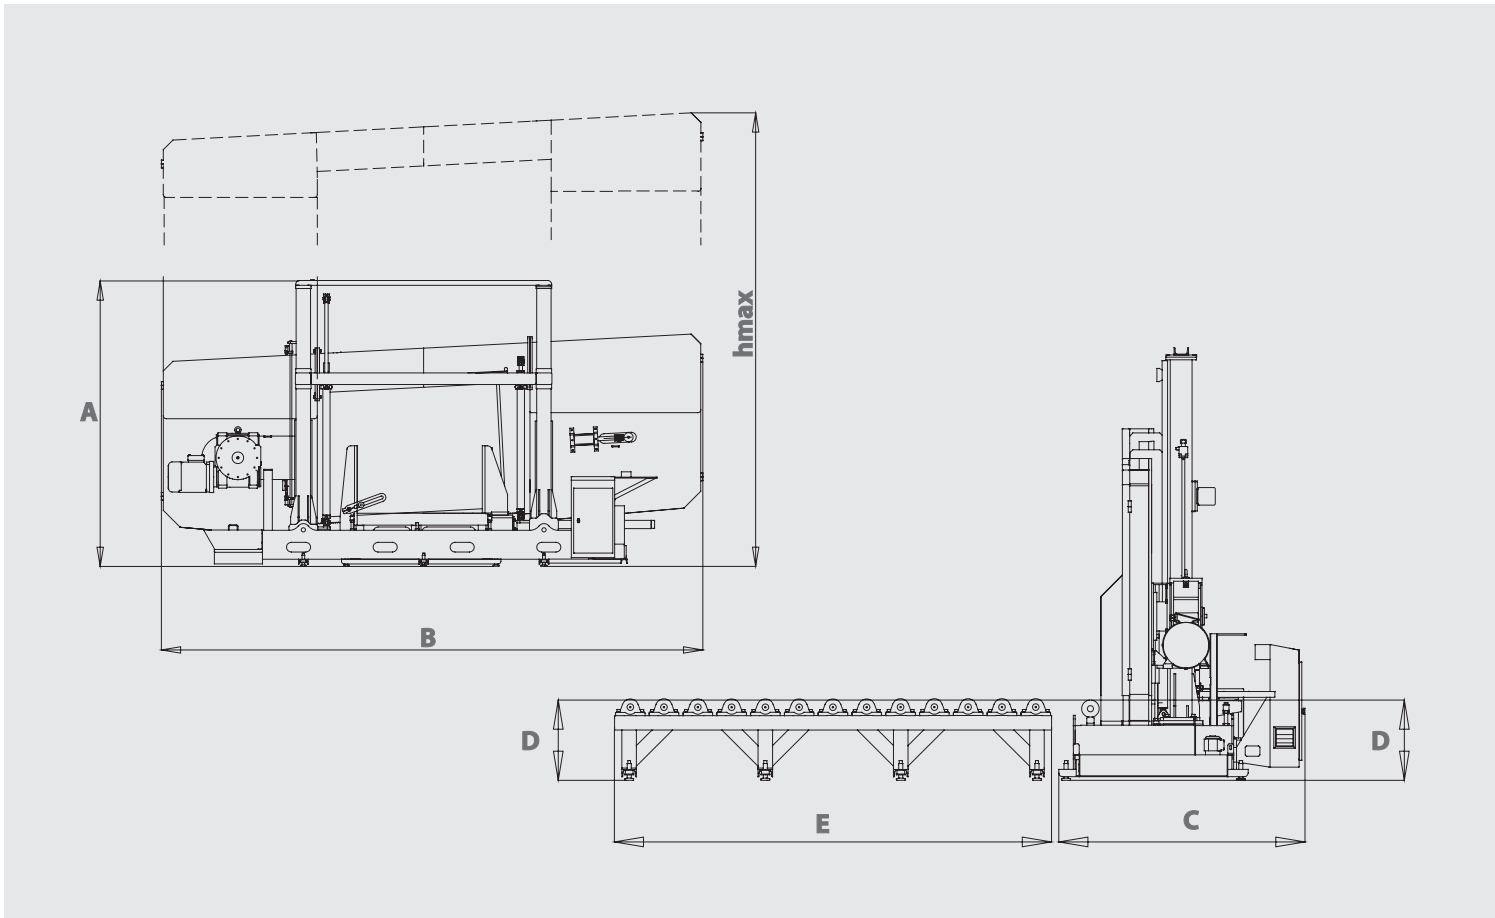


TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	3000 mm 118.11 inch	B	5625 mm 221.46 inch	C	1690 mm 66.54 inch	D	525 mm 20.67 inch	E	3000 mm 118.11 inch	hmax	3725 mm 146.65 inch
---	------------------------	---	------------------------	---	-----------------------	---	----------------------	---	------------------------	------	------------------------


Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 67 x 1.6 x 12450 mm 2 5/8 x 0.063 x 490.1 inch	Şerit Motoru Blade Motor 7.5 kW - 1500 d/dk 10 hp - 1500 rpm	Talaş Fırçası M. Chip Brush M. 0.09 kW - 1500 d/dk 0.12 hp - 1500 rpm
Hidrolik Motor Hydraulic Pump Motor 3 kW - 1500 d/dk 4 hp - 1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 10.71 kW 14.36 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	Ağırlık Weight 7000 kg 15432 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

90°	mm inch	60°	45°	30°	0°	10°	15°	20°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity				1200 mm 47.24 inch			
1200 mm 47.24 inch	1300 mm 51.18 inch				1200 x 1200 mm 47.24 x 47.24 inch			
					1200 x 1300 mm 47.24 x 51.18 inch			

CSM 1200 / 2000

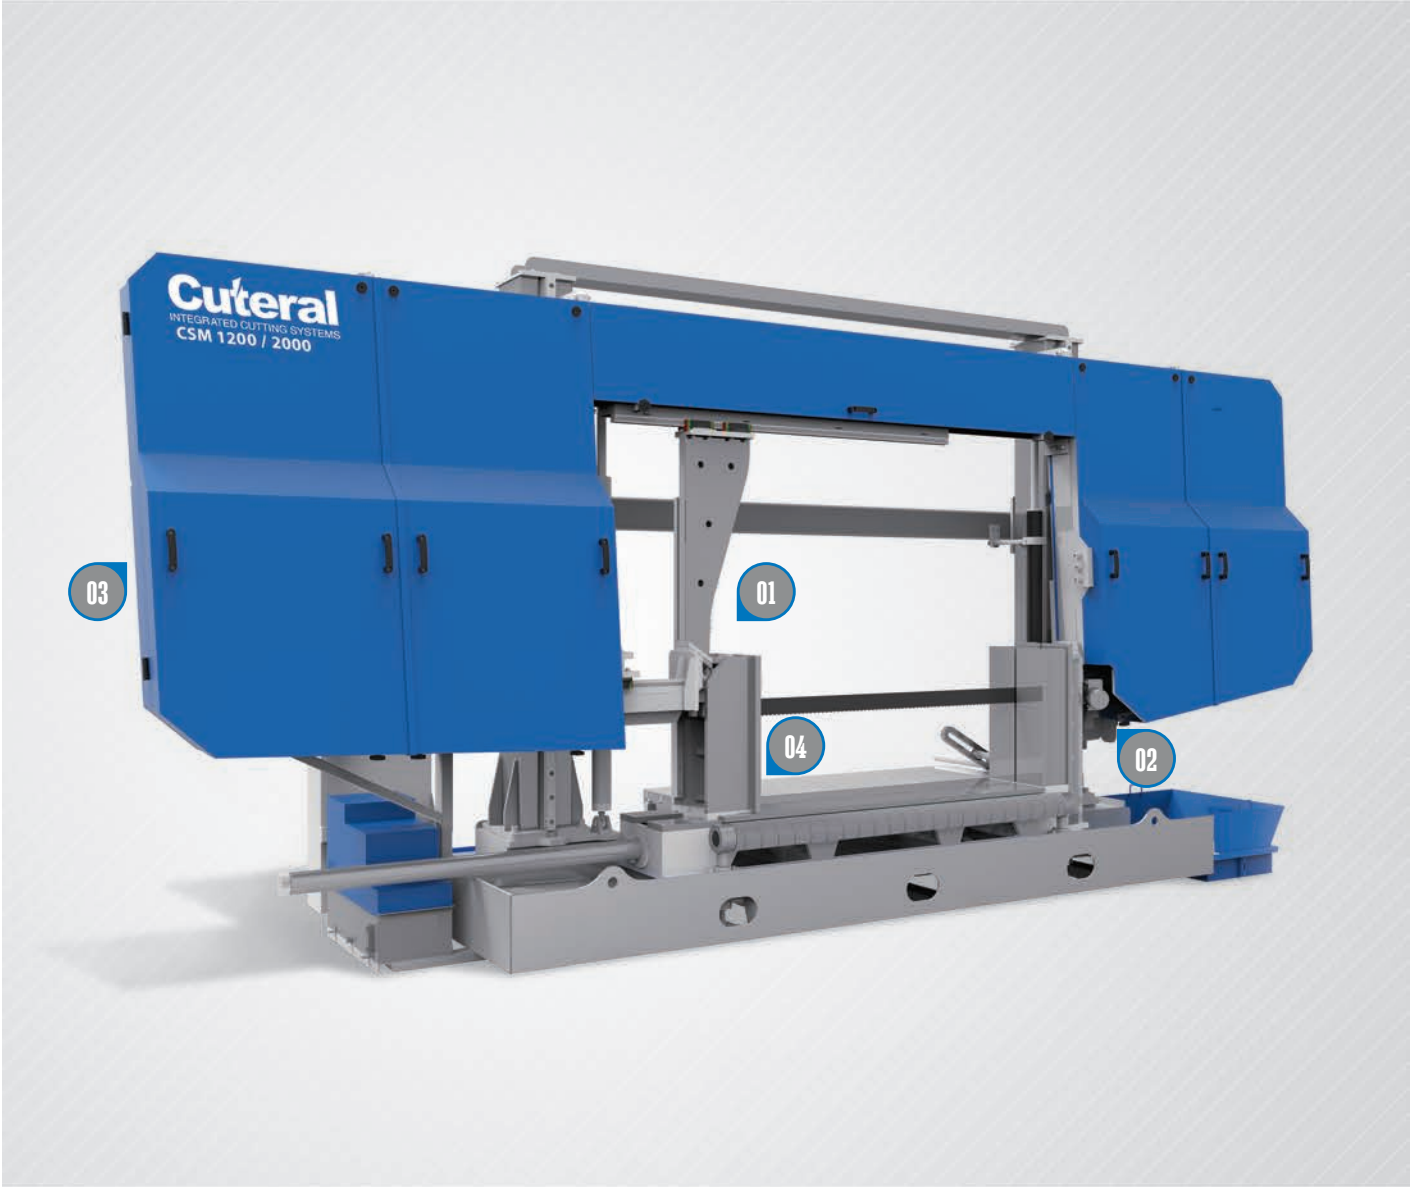


YARI OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

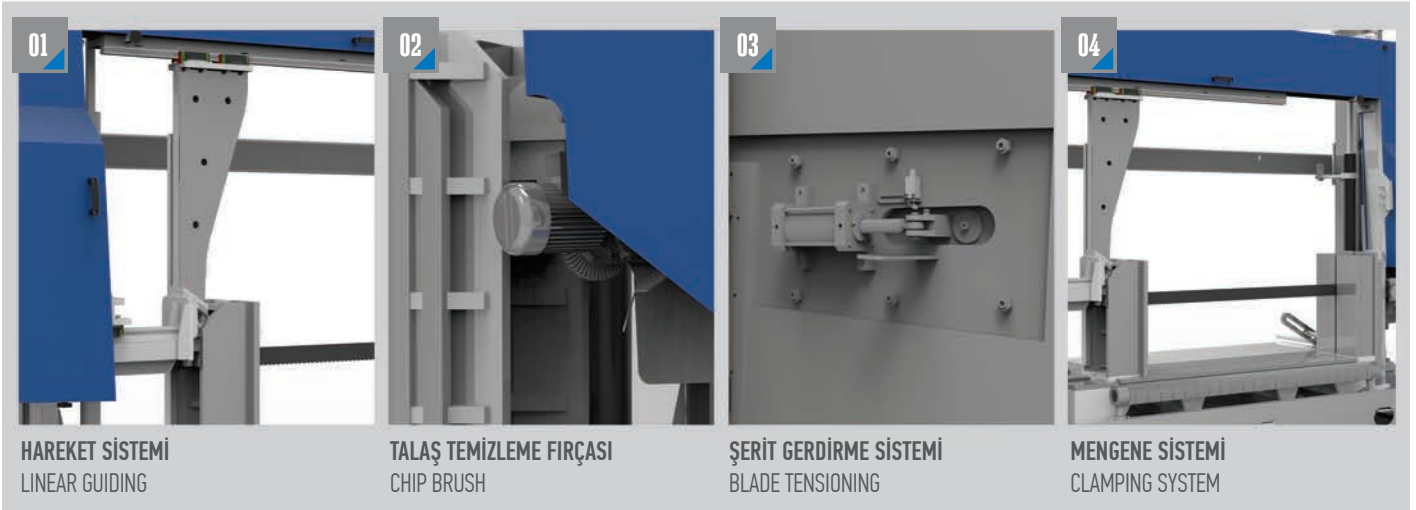

ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

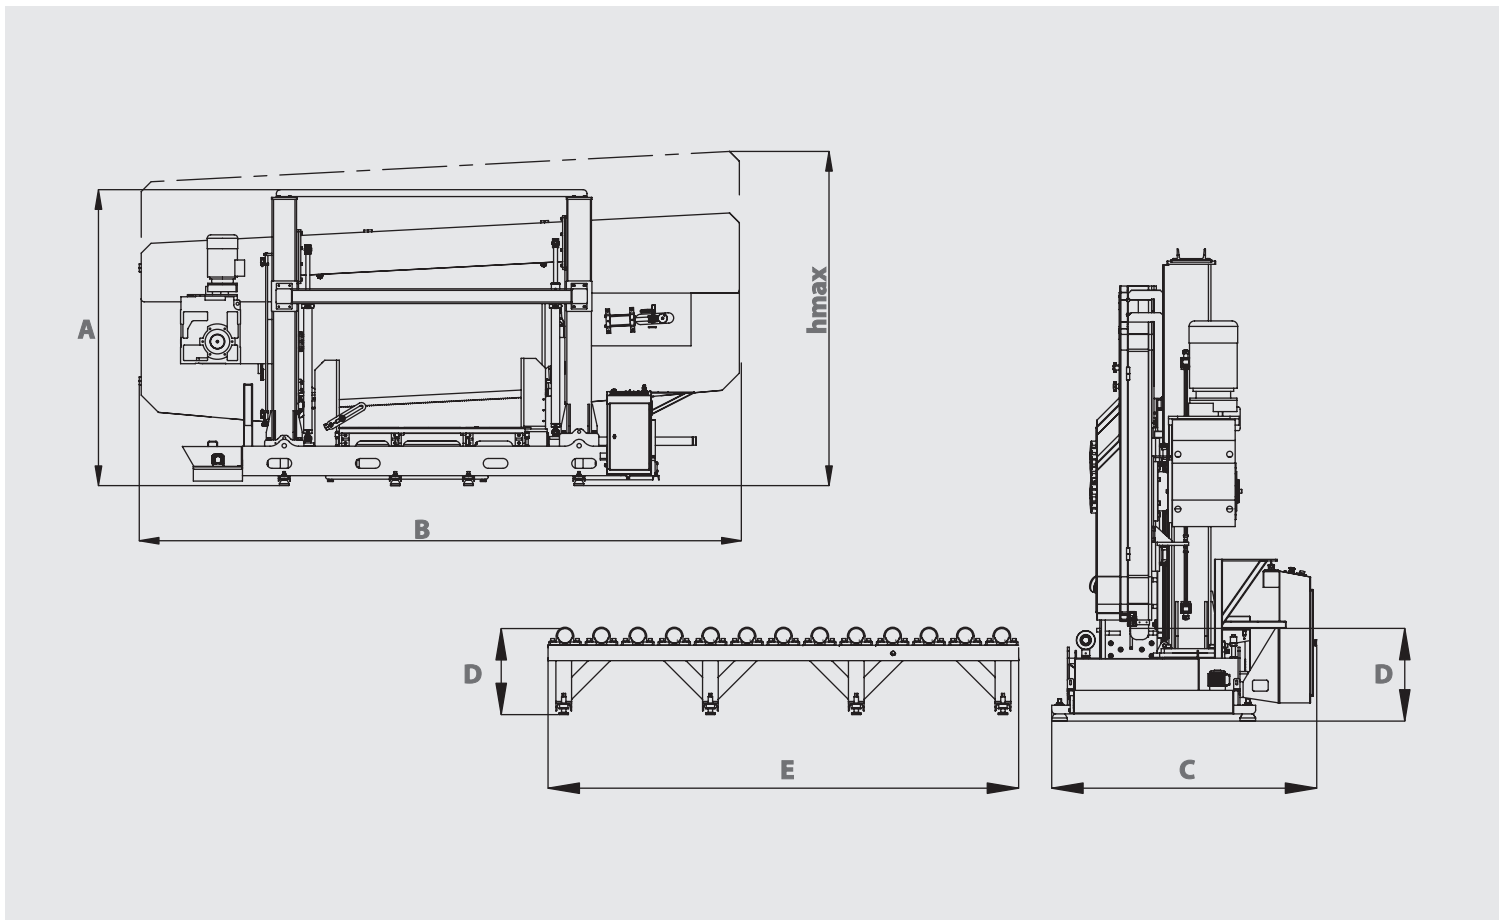

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	3015 mm 118.70 inch	B	6125 mm 241.14 inch	C	1690 mm 66.54 inch	D	591 mm 23.27 inch	E	3000 mm 118.11 inch	hmax	3765 mm 148.23 inch
---	------------------------	---	------------------------	---	-----------------------	---	----------------------	---	------------------------	------	------------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 80 x 1.6 x 13460 mm 3 x 0.063 x 529.92 inch	Şerit Motoru Blade Motor 11 kW - 1500 d/dk 14.75 hp - 1500 rpm	Talaş Fırçası M. Chip Brush M. 0.09 kW - 1500 d/dk 0.12hp - 1500 rpm
Hidrolik Motor Hydraulic Pump Motor 3 kW - 1500 d/dk 4 hp - 1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.37 kW - 3000 d/dk 0.49 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 14.46 kW 19.39 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 60 m/dk - 196 ft/min	Ağırlık Weight 8750 kg 19290 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidrolik Hydraulic

Kesim Kapasitesi Cutting Capacity 1200 mm 47.24 inch	Kesim Kapasitesi Cutting Capacity 2000 mm 78.74 inch	90°	60°	45°	30°	0°	15°	10°	5°