



PSM 220 230 DM

Yarı Otomatik Çift Yön Açılı Testere Tezgahı

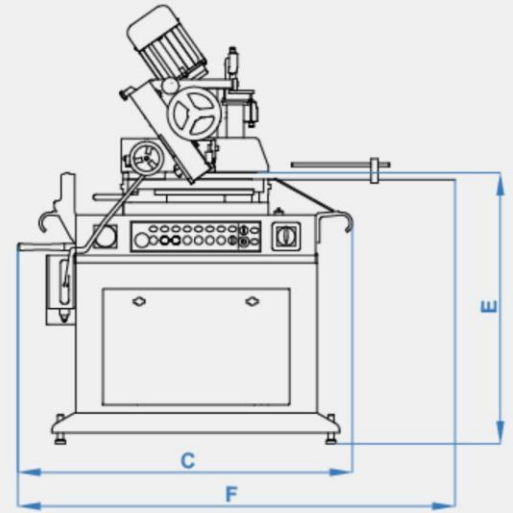

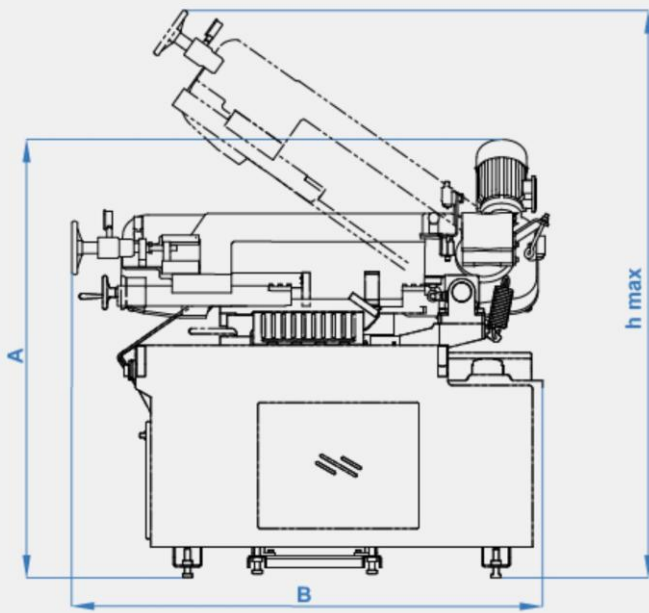

A	1555 mm 61.22 inch	B	1670 mm 65.75 inch	C	1185 mm 46.65 inch	D	400 mm 15.75 inch	E	695 mm 27.36 inch	F	455 mm 17.91 inch	hmax	2010 mm 79.13 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	----------------------	---	----------------------	------	-----------------------

	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension		Şerit Motoru Blade Motor		Sürücü Motor Feeding Motor
			27 x 0.9 x 3175 mm 1 x 0.035 x 125 inch		1.1 kW - 1000 d/d 1.47 hp - 1000 rpm		Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor		Soğutucu Motor Cooling Liquid Motor		Voltaj Voltage		Maksimum Güç Maximum Power
	0.75 kW - 1400 d/dk 1 hp - 1400 rpm		0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm		400 V 400 V		1.97 kW 2.64 hp
	Kesme Hızı Cutting Speed		Ağırlık Weight		Malzeme Sıkma Sistemi Material Clamping System		Şerit Germe Sistemi Blade Tensioning System
	25 m/dk - 100 m/dk 82 m/dk - 328 ft/min		670 kg 1477 lbs		PNömatik Pneumatic		Hidromekanik Hydramechanic

		mm inch	60°	45°	30°	0°	15°	35°	80°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity		220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	130 mm 5.11 inch
220 mm 8.66 inch	330 mm 12.99 inch		180 mm 7.08 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	210 mm 8.26 inch	110 mm 4.33 inch
			220 x 180 mm 8.66 x 7.08 inch	220 x 280 mm 8.66 x 11.06 inch	220 x 330 mm 8.66 x 12.99 inch	220 x 280 mm 8.66 x 11.06 inch	210 x 180 mm 8.26 x 7.08 inch	100 x 130 mm 3.93 x 5.11 inch	